



HEAT PUMPS



HEATING AND COOLING SOLUTIONS

**DUCTED SYSTEMS**




## THE PEOPLE'S CHOICE OF HEAT PUMPS

Our customers voted for us! We're proud to have won Consumer's People's Choice Award for the heat pump category in 2024. The award, presented by New Zealand's leading independent consumer advocacy group, recognises products and services that stand out for customer satisfaction and is based on customer satisfaction surveys from a representative sample across New Zealand.

## MITSUBISHI HEAVY INDUSTRIES HEAT PUMPS NEW ZEALAND

Mitsubishi Heavy Industries Heat Pumps is a trusted supplier of premium residential and commercial heat pump and air conditioning systems to the New Zealand market. Delivering engineering excellence for over 130 years, the Mitsubishi Heavy Industries brand is instantly recognisable for quality and technological advancement.

With innovation central to both the organisation and the development of heat pump systems, Mitsubishi Heavy Industries carries a strong philosophy of engineering products that are designed to improve the lives of those who use them and, at the same time, create a sustainable future for our company and the world we live in.

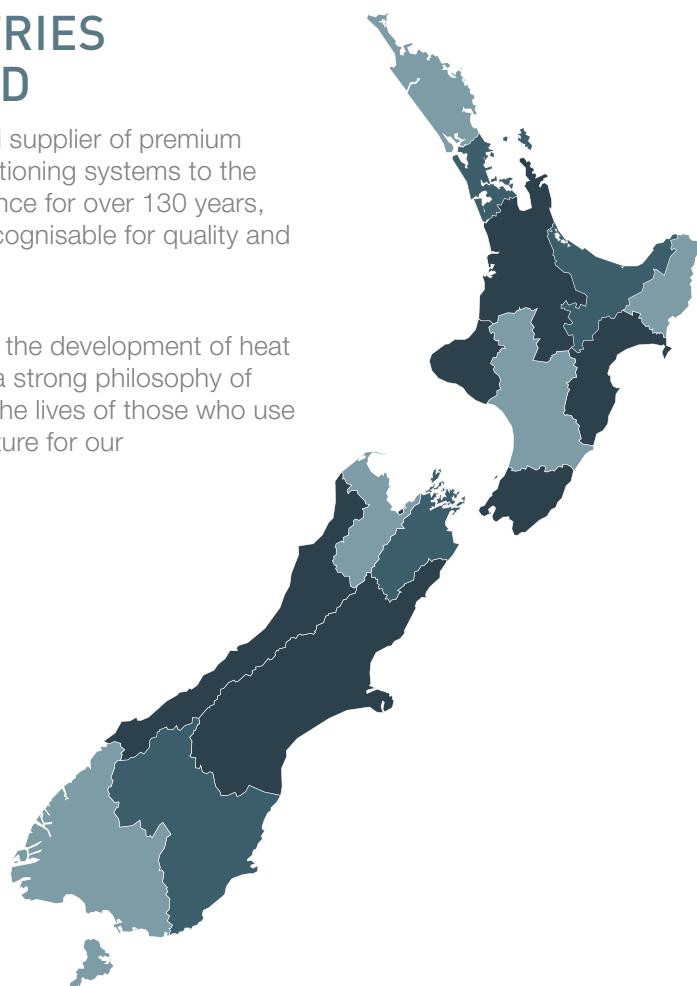



## COMMITTED TO QUALITY

Standing behind the quality of our products is our commitment to our customers and our after sales service guarantees. Along with the rigorous quality assurance testing carried out on all our products, comprehensive warranties provide you with peace of mind.



## DEDICATED LOCAL SUPPORT

Located in our Auckland head office, our dedicated customer service team are on hand to support our customers. Whether it's a question about our products, troubleshooting, warranty information or a user manual - our team of local experts are here to help.



## 5 YEARS PARTS AND LABOUR WARRANTY

Mitsubishi Heavy Industries focuses solely on manufacturing high performance heat pumps for the New Zealand market. All our systems are of the highest quality and are backed by a full 5 year parts and labour warranty.



## ENERGY PERFORMANCE STANDARDS

To comply with New Zealand standards and deliver the most efficient solutions possible to our customers, all Mitsubishi Heavy Industries systems meet and exceed the Minimum Energy Performance Standards (MEPS).




# MHI Ducted Systems

Our powerful yet quiet reverse cycle ducted systems let you enjoy the comfort of air conditioning in every part of your home or office with one packaged solution. With a discreet, low profile design that can be completely concealed in your ceiling and a variety of capacities and control options available, our ducted systems offer a flexible solution for any new or existing home.

Mitsubishi Heavy Industries ducted systems include an indoor unit (fan coil), outdoor unit (condenser) and controller while an installer will also incorporate insulated ducting, air outlets and a return air inlet with a filter. These components work in unison to offer a complete heating and cooling solution and ensure your comfort all year round.

All Mitsubishi Heavy Industries ducted systems are reverse cycle and have undergone strict and rigorous testing and quality control measures to ensure they are of the highest standards and will withstand the tough Kiwi climate.

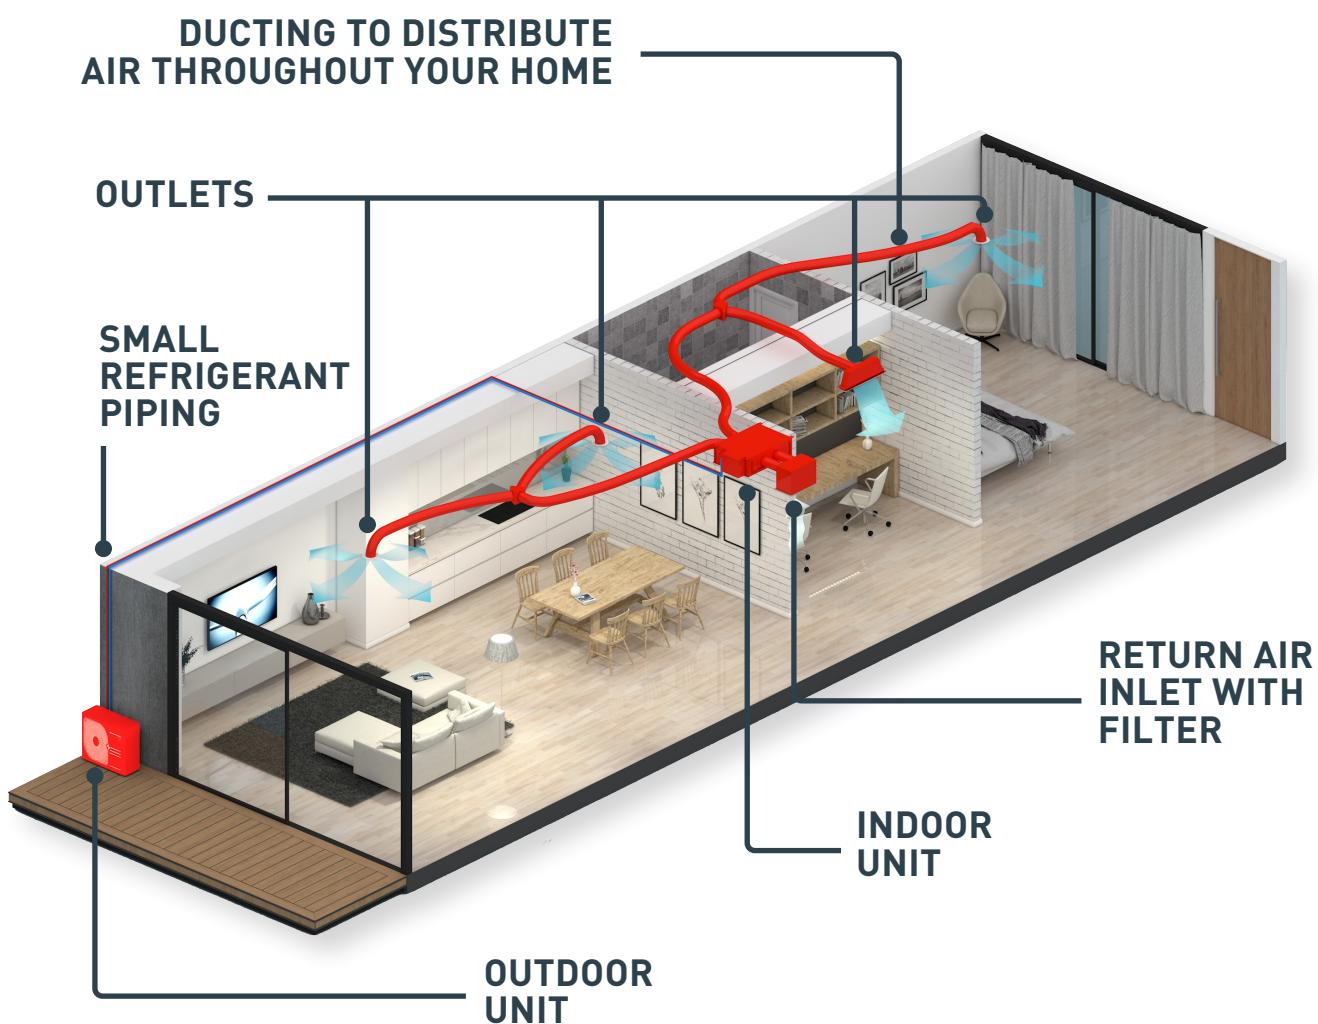

# Our Technology

## IMPROVED HEAT EXCHANGER


Our new and improved heat exchanger has been developed to improve refrigerant distribution and increase the systems effectiveness. The new design features a larger heat exchange area, boosting the unit's overall efficiency.

## COATED PCB

To protect against humid weather a protective coating is applied to the circuit board in the outdoor unit, allowing it to withstand New Zealand's varying weather conditions and ensure the longevity of your system.

## BLUE FIN TECHNOLOGY

Mitsubishi Heavy Industries outdoor units are coated with specially formulated layers that assist in preventing the hydrophilicity effect and assists in reducing the corrosion rate of the aluminium section from harsh New Zealand weather conditions.

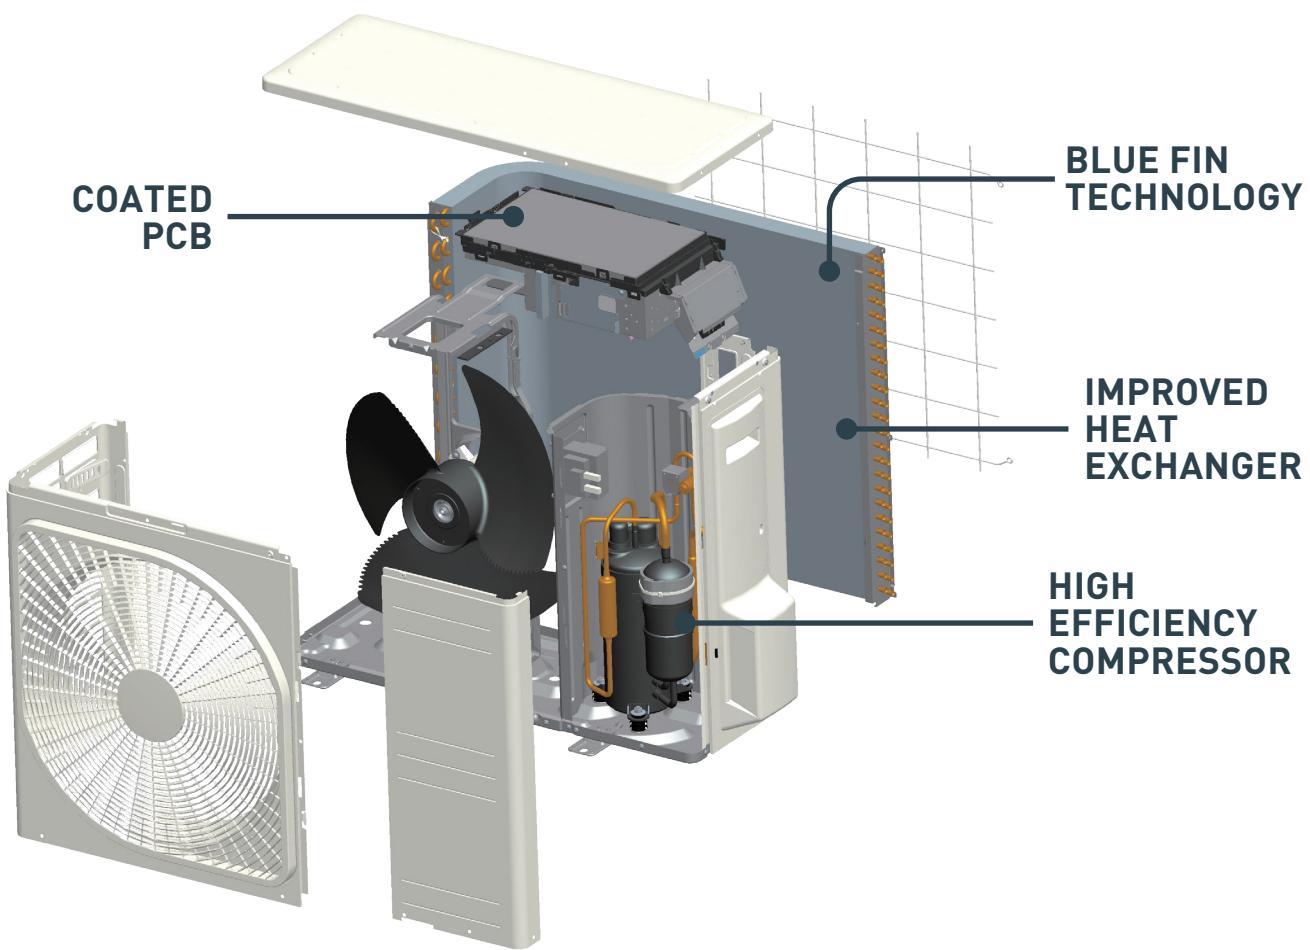

## HIGH EFFICIENCY COMPRESSOR

One of the key features that provides Mitsubishi Heavy Industries heat pumps with their powerful performance is our highly efficient compressor. Combined with a Neodymium motor that uses powerful, rare earth magnets, Mitsubishi Heavy Industries heat pumps can deliver a higher motor efficiency while producing much less operational noise.

## DC PAM INVERTER


The PAM control used in Mitsubishi Heavy Industries heat pumps helps minimise the loss of electricity and boost the efficiency by allowing the unit to reach the temperature quickly before slowing down the compressor. This allows the unit to save energy while maintaining a comfortable temperature in the room.

## WIDE OPERATION RANGE

With our advanced technology and high quality components, Mitsubishi Heavy Industries heat pumps can operate in ambient outdoor temperatures as low as -20°C in heating mode and as high as +50°C in cooling mode.

This permits the installation in areas where the temperature conditions can be considered extreme.

# FDUM Series

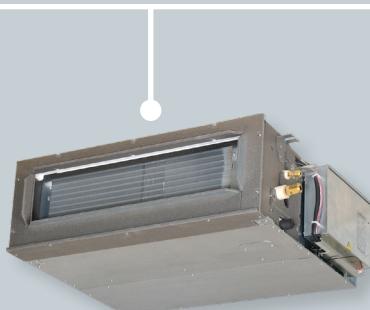

\*See pg. 11 for full list of features and functions

## MEDIUM STATIC PRESSURE

SINGLE PHASE MODELS (5.0kW - 5.6kW)



Energy Saving



Hi Power



Silent Operation



Automatic Operation



Weekly/Sleep/  
Peak-Cut Timer



Self-Diagnostics

## 5.0kW | 5.6kW

Our FDUM series of medium static ducted systems are quiet, compact and come in both 5.0kW and 5.6kW capacities. Incorporating a range of convenient and energy saving features and functions, the FDUM series is the perfect multi-room heating and cooling solution for smaller Kiwi homes.

## HYPER-INVERTER TECHNOLOGY

Our advanced hyper-inverter technology allows our ducted systems to reach the desired temperature quicker than ever before. Once the system has reached the set temperature it will ramp down and maintain this closely, switching on only when required - ensuring your comfort all year round and reducing energy consumption.

## QUIET OPERATION

The FDUM series boasts a super quiet operation level of 26 dB (A) on low fan speed. Combined with the unit's Silent Mode, the FDUM is perfect for bedrooms and ensures a good night's sleep for you and your family.

SRC50-60ZSX-W outdoor unit shown.

## R32 REFRIGERANT

Due to its superior qualities, R32 refrigerant used in the FDUM series requires less energy to achieve the desired temperature and has nearly a 70% lower Global Warming Potential when compared to the R410A refrigerant.


## BUILT-IN DRAIN PUMP

With a built-in drain pump the FDUM series allows greater flexibility during installation, making it the perfect solution for applications with limited ceiling space.

## OTHER CONTROL OPTIONS (SOLD SEPARATELY)




Wi-Fi



WIRELESS

# FDU Series

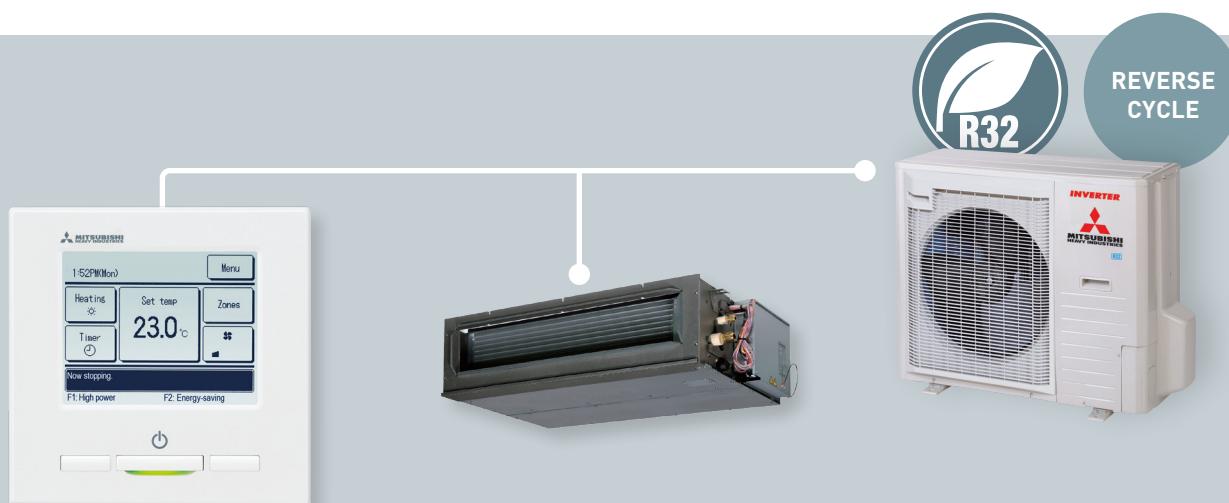

\*See pg. 11 for full list of features and functions

## MED/HIGH STATIC PRESSURE

SINGLE PHASE MODELS (7.1 kW - 14.0kW)  
THREE PHASE MODELS (12.5kW - 14.0kW)



Energy Saving



Hi Power



Silent Operation



Automatic Operation



Weekly/Sleep/  
Peak-Cut Timer



Self-Diagnostics

## 7.1kW | 10.0kW | 12.1kW | 12.5kW | 14.0kW

Our FDU series of slimline ducted systems are a quiet and discreet solution for multiple rooms. Coming in a range of capacities ranging from 7.1kW up to 14kW and incorporating a range of convenient features and functions, the FDU series is the perfect heating and cooling solution for any sized Kiwi home.

## QUIET OPERATION

Thanks to our highly efficient DC fan motor, the FDU series boasts some of the quietest operation levels on the market - with our 7.1kW unit achieving a market leading low of 25 dB (A) on low fan speed. Combined with the unit's Silent Mode, the FDU series ensures no interruptions to room acoustics and a good night's sleep for you and your family.

## SLIM LOW PROFILE DESIGN

With a slim, low-profile design measuring only 280mm in height, the FDU series offers the perfect solution for applications where ceiling space is limited.

## INCREASED ENERGY EFFICIENCY

With an improved heat exchanger in the outdoor unit, boosting refrigerant distribution throughout the system, coupled with our highly efficient DC fan motor within the indoor unit, the FDU series boasts industry leading energy efficiencies which means reduced running costs for your home.

## BUILT-IN DRAIN PUMP


With a built-in drain pump the FDU series allows greater flexibility during installation, making it the perfect solution for applications with limited ceiling space.

FDCA100VNP-W outdoor unit shown.

## OTHER CONTROL OPTIONS (SOLD SEPARATELY)



Wi-Fi



WIRELESS

# FDUA Series



\*See pg. 11 for full list of features and functions

## HIGH STATIC PRESSURE

SINGLE PHASE MODELS (10.0kW - 16.0kW)  
THREE PHASE MODELS (12.5kW - 23.5kW)



Energy Saving



Hi Power



Silent Operation



Automatic Operation



Weekly/Sleep/  
Peak-Cut Timer



Self-Diagnostics

**10.0kW | 12.1kW | 12.5kW | 14.0kW | 16.0kW | 20.0kW | 23.5kW**

Our FDUA series of ducted systems are a quiet and discreet solution for multiple rooms. Coming in a range of capacities ranging from 10kW up to 23.5kW and incorporating a range of convenient features and functions, the FDUA is the perfect heating and cooling solution for any sized Kiwi home.

## INCREASED ENERGY EFFICIENCY

With an improved heat exchanger in the outdoor unit, boosting refrigerant distribution throughout the system, coupled with our highly efficient DC fan motor the FDUA series boasts impressive energy efficiencies which means reduced running costs for your home.

## COMPACT INDOOR UNIT DESIGN

A compact indoor unit allows the FDUA series to be easily installed in a variety of different applications while a splittable design for 14kW and 16kW models, allows for the indoor unit to be separated into two parts for easier installation.

## QUIET OPERATION


Thanks to our highly efficient DC fan motor, the FDUA series boasts quiet operation levels. Combined with the unit's Silent Mode, the FDUA series ensures no interruptions to room acoustics and a good night's sleep for you and your family.

## BUILT-IN DRAIN PUMP

With a built-in drain pump the FDUA allows greater flexibility during installation, making it the perfect solution for applications with limited ceiling space.

FDCA140VNX-W/FDCA140VSX-W outdoor unit shown.  
Splittable design applies to 14kW and 16kW models.


## OTHER CONTROL OPTIONS (SOLD SEPARATELY)



Wi-Fi

WIRELESS

# KX Series

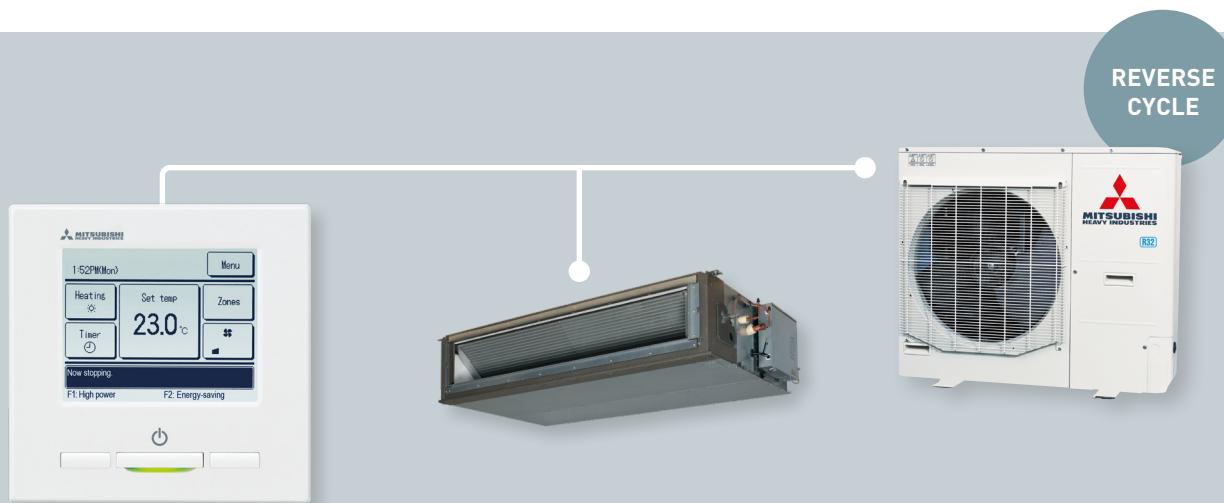

\*See pg. 11 for full list of features and functions

## HIGH STATIC PRESSURE

SINGLE PHASE MODELS (9.0kW - 15.2kW)

THREE PHASE MODELS (14.0kW - 28.0kW)



Energy Saving



Hi Power



Silent Operation



Automatic Operation



Weekly/Sleep/  
Peak-Cut Timer



Self-Diagnostics

**9.0kW | 11.2kW | 14.0 kW | 15.2kW | 22.4kW | 28.0kW**

Our KX series of ducted systems offer a durable and high performance heating and cooling solution. Coming in a range of capacities ranging from 9.0kW up to 28.0kW and incorporating VRF technology as well as a range of convenient features, KX compact series is the perfect heating and cooling solution for larger Kiwi homes.

## VRF TECHNOLOGY

Traditionally used in larger, commercial projects, the KX compact series incorporates VRF (Variable Refrigerant Flow) technology to deliver high performance.

## COMPACT OUTDOOR UNIT

A compact outdoor unit offers additional flexibility with installation by allowing the outdoor unit to fit within smaller spaces.

## BLUE FIN™ TECHNOLOGY

A specially formulated layer applied to internal components helps reduce corrosion and protect the outdoor unit's internal aluminium parts from the harsh Kiwi weather conditions.

## BUILT-IN DRAIN PUMP


With a built-in drain pump the KX series allows greater flexibility during installation, making it the perfect solution for applications with limited ceiling space.

FDC90-155KXZEN(S)1-W outdoor unit shown.  
Not compatible with FlexiZone zoning solution.

## OTHER CONTROL OPTIONS (SOLD SEPARATELY)




Wi-Fi



WIRELESS

# AKARI™ Series

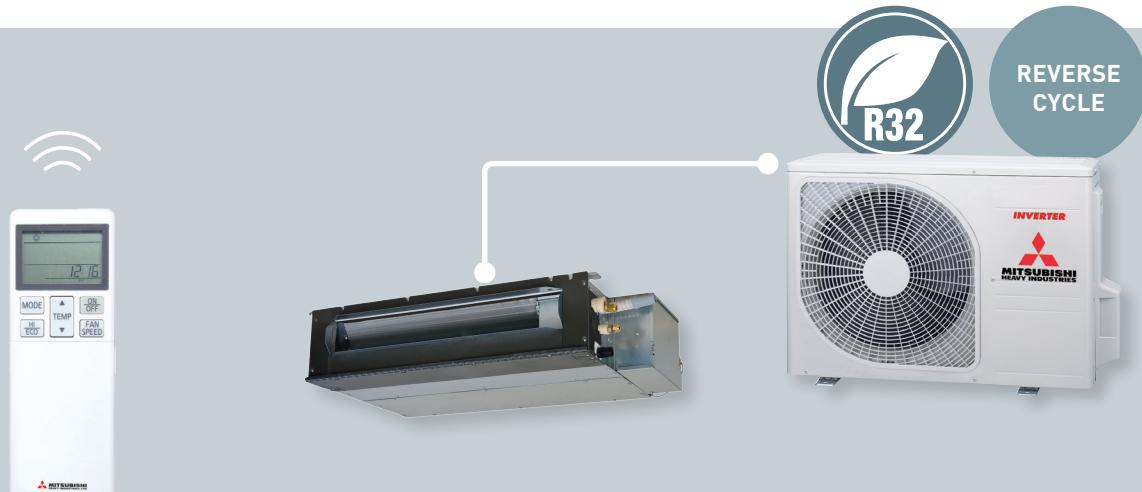

\*See pg. 11 for full list of features and functions

## BULKHEAD SYSTEM SINGLE PHASE MODELS (2.5kW - 5.6kW)



## 2.5kW | 3.5 kW | 5.0kW | 5.6kW

Our Akari™ series of low profile bulkhead systems are designed to sit within your ceiling space and distribute air via discreet grilles. These compact units require no ducting and are perfect for renovated spaces and applications such as apartments where space is at a premium. They deliver a quiet, efficient and integrated heating and cooling solution.

### SUPER SLIM LOW PROFILE DESIGN

With a super slim, low-profile design measuring only 200mm in height, the Akari™ series offers the perfect solution for apartments or applications where ceiling space is limited and the indoor unit needs to be fitted in a concealed area.

### SUPER QUIET OPERATION

The Akari™ series offers some of the quietest operation levels on the market achieving 24 dB(A) on low fan mode - perfect for bedrooms.

### BUILT-IN DRAIN PUMP


Capitalising on Mitsubishi Heavy Industries extensive experience in drain pump technology, the Akari™ series features a built-in condensation drain pump for easier installation.

### HI POWER OPERATION

Provides 15mins of boosted power allowing you to quickly heat or cool your home before returning to normal operation. Perfect for when you first turn on the unit.

SRC25-35ZSA-W outdoor unit shown.

### OTHER CONTROL OPTIONS (SOLD SEPARATELY)



# Features and Functions

	FUNCTION		DESCRIPTION				
	FDU	FDUA	FDUM	KX	AKARI		
AIRFLOW	 Automatic Fan Speed	On-board microcomputer continuously monitors the room's air temperature and adjusts the air flow automatically.	<input checked="" type="checkbox"/>				
	 Air Filter	The air filter in the unit traps and removes airborne dust particles and other allergens to provide you with a clean air function.					<input checked="" type="checkbox"/>
	 Filter Sign	Alerts you to when the filter needs to be cleaned.	<input checked="" type="checkbox"/>				
	 Outside Air Intake	Allocated outside air inlet connection available on indoor unit to provide fresh air into the room, avoiding the constant recycling of internal air. **	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
	 Self-Clean Operation	Dries the indoor unit components by running the fan on ultra-low mode, preventing the growth of mould. Designed to be run regularly after use.					<input checked="" type="checkbox"/>
ENERGY SAVING	 Set Temperature Auto Return*	Allows you to program a preferred set temperature that the unit will return to each time it is operated.	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
	 Home Leave Operation*	Will maintain a moderate indoor temperature, avoiding extremely hot or cool temperatures. Perfect for when you're away on holidays.	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
	 Eco Operation	The unit operates at a slightly reduced capacity to reduce power consumption while maintaining a comfortable room temperature.	<input checked="" type="checkbox"/>				
COMFORT & CONVENIENCE	 Hi Power Operation*	Provides 15mins of boosted power allowing you to quickly heat or cool your home before returning to normal operation. Perfect for when you first turn on the unit.	<input checked="" type="checkbox"/>				
	 Dry Operation	Reduces humidity by removing moisture from the air without effecting the indoor temperature.	<input checked="" type="checkbox"/>				
	 Silent Operation	Allows you to program periods where the unit will operate with reduced noise levels, perfect for night time and an uninterrupted sleep.	<input checked="" type="checkbox"/>				
	 Automatic Operation	Automatically selects the required heating or cooling function based on the current room conditions.	<input checked="" type="checkbox"/>				
	 Function Switch*	From the six available functions on the unit, this function allows you to set two functions to operate automatically. (Note: this is not available when a centralised remote control is connected).	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
TIMERS	 On/Off Timer	Set your unit to turn on and off once, at specific times, within a 24 hour period. Unit will then turn on and off at the specified times every day.	<input checked="" type="checkbox"/>				
	 Weekly Timer	Set your unit to turn on and off automatically on a weekly basis to suit your usual room usage on each day.	<input checked="" type="checkbox"/>				
	 Sleep Timer	This function allows you to set a per-determined amount of time between 30 and 240 mins that your unit will operate for before switching off.	<input checked="" type="checkbox"/>				
	 Night Setback	Designed for the colder seasons, this function ensures the room temperature is kept at around 10°C, even while unoccupied.					<input checked="" type="checkbox"/>
	 Peak-Cut Timer*	This function lets you to preset the capacity limit during certain periods of the day, minimising energy consumption during peak billing times, thus reducing operation costs.	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
MAINTENANCE & PREVENTION	 Child Lock	Locks the remote control to prevent little ones from changing functions and other settings. Useful for families with curious young children.					<input checked="" type="checkbox"/>
	 Self-Diagnostics	Microcomputer automatically runs a diagnostic of the system in the event of a malfunction. This enables your authorised dealer to isolate and repair any issues.	<input checked="" type="checkbox"/>				
	 Improved Serviceability	The fan unit (comprised of impeller and motor) is easily accessible from either the side or bottom of the unit and can be slid out for easy maintenance. (Not applicable to all models)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
	 Built-in Drain Pump	The built-in drain pump, which includes a lift of 600 or 850mm, allows greater flexibility with installation, offering a great solution for applications with limited space.	<input checked="" type="checkbox"/>				
	 Auto Restart Function	Automatically restarts the unit in the same operating mode if it suffers a loss of power. (Disabled for some models by default)	<input checked="" type="checkbox"/>				

\*Functions can only be enabled using RC-EXZ3A wired controller.

On/off timer, weekly timer and sleep timer are disabled if Wi-Fi accessory connected. Similar functions can be set via the AC Cloud application.

# Control Options



## WIRED CONTROLLER

- Large, 3.8" backlit LCD touch screen with easy to navigate menu.
- Control the set temperature, operation mode and fan speed.
- Access timer and scheduling functions.
- Access additional features including Home Leave mode, Silent Mode, High Power mode plus many more.
- Multi-language display (12 languages)

\*RC-EXZ3A controller shown.

\*\*Requires SC-BIKN2-E kit (sold separately) for use with bulkhead systems.

\*\*\*Function limitations may apply.



## WIRELESS CONTROLLER

- LCD Display.
- Control the set temperature, operation mode and fan speed.
- Access timer and scheduling functions.

\*Wireless controller from RCN-KIT4-E2 shown. Standard with bulkhead systems.

\*\*Requires RCN-KIT4-E2 wireless kit (sold separately) for use with ducted systems.

\*\*\*Function limitations may apply.



## WI-FI

- Control your system using your smart device (iPhone, iPad, Android) or internet browser via AC Cloud Control app.
- Control the set temperature, operation mode and fan speed remotely.
- Control your system using Voice Commands via Google or Amazon smart speaker devices.
- Set up 'favourite' scenes and activate them with a single tap.
- Set your system to respond to the weather, you arriving home, calendar events + more\*\*.
- Receive instant notifications and email updates and create usage logs\*\*

\*Requires MH-RC-WIFI-1B Wi-Fi adaptor (sold separately) for use with ducted systems.

\*Requires MH-AC-WIFI-1 Wi-Fi adaptor (sold separately) for use with bulkhead systems.

\*\*In conjunction with IFTTT and other apps (must be downloaded separately).

Some additional functions including zone control are not available via AC Cloud Control app.

In some applications, a 12V DC external power supply may be required for MH-RC-WI-FI-1B.



**AC Cloud Control**

Controlling your device with AC Cloud Control app requires aforementioned Wi-Fi adaptors and working internet or Wi-Fi connection. Google Account required for use with Google devices. Features and services may change without notice. Google is a trademark of Google LLC.

# FlexiZone Zoning Solution




## RC-EXZ3D WIRED ZONE CONTROLLER

- Individual on/off control of up to 8 zones when used in conjunction with MHIAA's zoning solution\*.
- Large, 3.8" backlit LCD touch screen with easy to navigate menu.
- Control the operation mode and set temperature of your system.
- Access timer and scheduling functions.
- Access additional features including Home Leave mode, Silent Mode and High Power mode.
- Multi-language display (6 languages)

RC-EXZ3D controller shown. \*MHI zoning solution required zone relay board MH-4ZRM (4-Zone) or MH-8ZRM (8-zone), sold separately. \*\*\*Flexizone not compatible with KX 1:1 systems



**FLEXIZONE®**

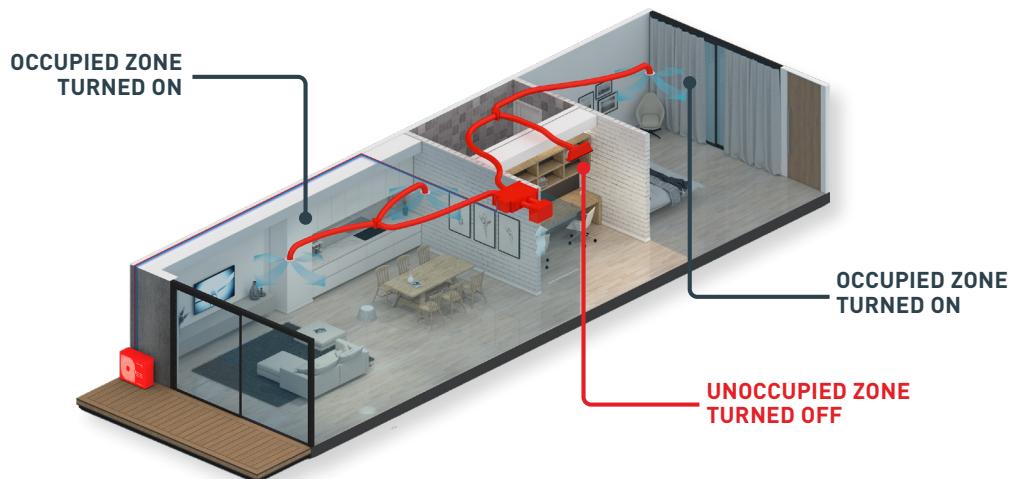

# Airzone Zoning Solution

Easily integrated into any MHI ducted system the advanced Airzone zoning solution offers the ultimate level of comfort by providing complete temperature control over each individual zone of your home or office.



**AIRZONE**

## AIRZONE ZONE CONTROLLER

- Individual temperature and on/off control of up to 10 zones when used in conjunction with Airzone zoning solution\*.
- Control the set temperature, operation mode and fan speed.
- Turn unoccupied zones off to save energy.
- Control your system using your smart device (iPhone, iPad, Android) or internet browser via easy to use Airzone app.
- Access timer and scheduling functions.

Blueface controller shown (AZVAFBLUEFACECB)

\*Airzone zoning solution includes motorised dampers, Airzone control board and webserver (sold separately)



## PRODUCT SPECIFICATIONS

# FDUM & FDU SERIES

CAPACITY		5.0 kW	5.6 kW	7.1 kW	10.0kW	10.0kW	12.1 kW	12.5 kW	14.0 kW	12.5 kW	14.0 kW
Set		FDUM50ZSXAWWH	FDUM60ZSXAWWH	FDU71AVNXWH	FDU100AVNPWH	FDU100AVNPWH	FDU125AVNPWH	FDU125AVNPWH	FDU140AVNPWH	FDU125AVNPWH	FDU140AVNPWH
Indoor		FDUM50VH	FDUM60VH	FDU71VH	FDU100VH	FDU100VH	FDU125VH	FDU125VH	FDU140VH	FDU125VH	FDU140VH
Outdoor		SRC50ZSXAW	SRC60ZSXAW	FDCA71VNXW	FDCA100VNPW	FDCA100VNPW	FDCA125VNPW	FDCA125VNPW	FDCA140VNPW	FDCA125VNPW	FDCA140VNPW
Power Source (Outdoor Unit)		1 Phase@ 240V / 50Hz									
Nominal Capacity Range	Cooling T1	5.0 (1.1-5.6)	5.6 (1.1-6.3)	7.1 (3.2-8.0)	10 (2.1-10.2)	10.0 (4.0-11.2)	12.1 (5.0-12.1)	12.5 (3.5-14.0)	14.0 (3.5-16.0)	12.5 (3.5-14.0)	14.0 (3.5-16.0)
	Heating H1	5.4 (0.6-6.3)	6.7 (0.6-7.1)	8.0 (3.6-9.0)	10 (1.7-10.4)	11.2 (4.0-12.5)	12.1 (4.0-13.3)	14.0 (2.7-17.0)	16.0 (2.7-18.0)	14.0 (2.7-18.0)	16.0 (2.7-20.0)
kW	Cooling H2	4.80	7.40	7.40	7.60	10.00	7.90	13.10	15.50	13.10	15.50
	Heating H2	1.51	1.77	3.08	2.99	3.65	3.49	4.22	3.49	4.22	4.22
Power Consumption	Cooling T1	1.59	1.78	2.45	2.66	3.28	3.61	4.22	3.61	4.22	4.22
	Heating H1	2.90	4.11	4.46	6.40	4.75	7.10	7.10	8.90	8.90	8.90
Max Power Consumption	Cooling T1	6.9	6.8	7.9	13.1	14.3	16.2	15.3	18.5	5.6	6.7
	Heating H1	7.2	7.8	7.9	10.4	12.7	13.8	15.9	18.5	5.9	6.8
*Operation Data	Inrush Current, Maximum Current	5.15	5.20	5.19	5.26	5.20	5.28	5.30	5.16	5.16	5.17
	EER	3.31	3.64	4.01	3.25	3.35	3.14	3.58	3.32	3.58	3.32
COP	Cooling T1	3.39	3.83	4.49	4.08	4.21	3.69	3.88	3.79	3.88	3.79
	Heating H1	—	—	—	—	—	—	—	—	—	—
Sound Power Level (JS C9612)	Sound Pressure Level (JS C9612)	63	65	66	68	70	73	69	68	68	69
	Outdoor	dB(A)	P-Hi36 Hi32 Me:29 Lo:26	P-Hi36 Hi31 Me:28 Lo:25	P-Hi38 Hi33 Me:29 Lo:25	P-Hi44 Hi38 Me:36 Lo:30	P-Hi45 Hi40 Me:34 Lo:29	P-Hi45 Hi40 Me:35 Lo:30	P-Hi47 Hi40 Me:35 Lo:30	P-Hi47 Hi40 Me:34 Lo:29	P-Hi47 Hi40 Me:35 Lo:30
External Dimensions (HxWxD)	Indoor	52	54	51	56	55	57	54	54	54	54
	Outdoor	mm	280x750x635	280x950x635	280x1370x740						
Net Weight	Indoor	29	34	34	54	54	54	54	54	54	54
	Outdoor	Kg	45	45	60	57	77	73	97	99	99
Supply Air Connection	mm	170x680	170x880	170x880	170x1200						
	Return Air Connection	mm	200x660	200x860	200x740	235x1280	235x1280	235x1280	235x1280	235x1280	235x1280
External Static Pressure (Max)	Pa	100	100	200	200	200	200	200	200	200	200
	Airflow	I/s	P-Hi217 Hi:167 Me:150 Lo:133	P-Hi333 Hi:250 Me:217 Lo:167	P-Hi400 Hi:316 Me:250 Lo:166	P-Hi600 Hi:467 Me:417 Lo:317	P-Hi650 Hi:533 Me:433 Lo:333	P-Hi650 Hi:533 Me:433 Lo:333	P-Hi800 Hi:583 Me:467 Lo:367	P-Hi800 Hi:583 Me:467 Lo:367	P-Hi800 Hi:583 Me:467 Lo:367
Refrigerant (R32)	Pre Charged To Pipe Length	m	15	15	30	15	30	15	30	30	30
	Liquid Line	mm	06.35 (1/4")	06.35 (1/4")	09.52 (3/8")	06.35 (1/4")*	09.52 (3/8")	09.52 (3/8")	09.52 (3/8")	09.52 (3/8")	09.52 (3/8")
Gas Line	Gas Line	mm	Q12.7 (1/2")	Q12.7 (1/2")	Q15.88 (5/8")						
	Connection Method	Flare Connection									
Installation Data	Maximum Pipe Length (One Way)	m	30	30	50	30	50	30	100	100	100
	Max vertical height diff. between O.U. and I.U.	m	20 (O.U. above I.U.) / 20 (O.U. below I.U.)	30 (O.U. above I.U.) / 15 (O.U. below I.U.)	20 (O.U. above I.U.) / 20 (O.U. below I.U.)	50 (O.U. above I.U.) / 15 (O.U. below I.U.)	20 (O.U. above I.U.) / 20 (O.U. below I.U.)	50 (O.U. above I.U.) / 15 (O.U. below I.U.)	50 (O.U. above I.U.) / 15 (O.U. below I.U.)	50 (O.U. above I.U.) / 15 (O.U. below I.U.)	50 (O.U. above I.U.) / 15 (O.U. below I.U.)
Controller		LB-KIT2									
Motion Sensor (Optional)		RC-E5, RC-EXZ3A, RCH-E3 or RCN-KIT4-E2									
Demand response (S4755)		Yes	Yes	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes
Outdoor air temperature (upper, lower limits)		°C	-15 to 46	-15 to 50	-15 to 46	-15 to 50					
Heating		-20 to 20	-20 to 20	-20 to 20	-20 to 20	-20 to 20	-20 to 20	-20 to 20	-20 to 20	-20 to 20	-20 to 20

\*The data is measured under the following conditions (AS / NZS 3823.2). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.

\*Reducer set 09.52 (3/8") -> 06.35 (1/4") is included in the outdoor unit as accessory for FDUM100VNP-W

# **FDUA SERIES**

## PRODUCT SPECIFICATIONS

The data set measured  $0.82 \rightarrow 0.95$  m/s in the outdoor unit as an accessory for  $7^{\circ}\text{CDB}$ ,  $19^{\circ}\text{CWB}$ , and  $19^{\circ}\text{CWD}$ . Heating: indoor temp. of  $20^{\circ}\text{CDB}$ , and outdoor temp. of  $7^{\circ}\text{CDB}$ ,  $6^{\circ}\text{CWB}$ .

# PRODUCT SPECIFICATIONS

## KX SERIES

CAPACITY		9.0kW	11.2kW	14.0kW	15.2kW	11.2kW	14.0kW	15.2kW	22.4kW	28.0kW	
Indoor		FDU90KXEEF-W	FDU112KXEEF-W	FDU140KXEEF-W	FDU160KXEEF-W	FDU112KXE6F-W	FDU140KXE6F-W	FDU160KXE6F-W	FDU160KXE6F-W	FDU160KXE6F-W	
Outdoor		FDG90KXZEN1-W	FDG112KXZEN1-W	FDG140KXZEN1-W	FDG155KXZEN1-W	FDG112KXZES1-W	FDG140KXZES1-W	FDG140KXZES1-W	FDG140KXZES1-W	FDG140KXZES1-W	
Power Source (Outdoor Unit)		1 Phase 240V 50Hz									
Nominal Capacity Range		Cooling T1	9.00	11.2	14.0	15.2	11.2	14.0	15.2	22.4	
		Heating H1	9.00	11.2	14.0	15.5	11.2	14.0	15.5	28.0	
Power Consumption (Indoor Unit)	kW	Cooling T1	0.25	0.32	0.36	0.43	0.32	0.36	0.43	1.20	
		Heating H1	0.25	0.32	0.36	0.43	0.32	0.36	0.43	1.20	
Power Consumption (Outdoor Unit)		Cooling T1	1.98	2.55	4.00	4.87	2.55	4.00	4.87	7.87	
		Heating H1	1.93	2.53	3.52	4.06	2.53	3.52	4.06	6.47	
Running Current (Indoor Unit)		Cooling T1	1.70	2.00	2.20	2.50	2.00	2.20	2.50	6.50	
		Heating H1	1.70	2.00	2.20	2.50	2.00	2.20	2.50	6.50	
Running Current (Outdoor Unit)	A	Cooling T1	8.30	10.7	16.8	20.5	3.8	6.0	7.4	12.9	
		Heating H1	8.10	10.6	14.8	17.1	3.8	5.4	6.2	10.6	
Inrush Current, Maximum Current			5.23	5.23	5.23	5.23	5.13.5	5.13.5	5.21	5.22	
Sound Pressure Level (dB C9612)	Indoor	P-Hi37 Hi:31 Me:27 Lo:22	P-Hi:40 Hi:36 Me:34 Lo:28	P-Hi:41 Hi:37 Me:34 Lo:29	P-Hi:45 Hi:38 Me:34 Lo:29	P-Hi:41 Hi:37 Me:34 Lo:28	P-Hi:40 Hi:36 Me:34 Lo:28	P-Hi:45 Hi:38 Me:34 Lo:29	P-Hi:52 Hi:50 Me:47 Lo:45	P-Hi:52 Hi:50 Me:47 Lo:45	
	Outdoor	53	54	54	54	54	54	54	54	63	
External Dimensions (HxWxD)	mm	280 x 950 x 635	280 x 1368 x 740	280 x 1368 x 740	280 x 1368 x 740	280 x 1368 x 740	280 x 1368 x 740	280 x 1368 x 740	379 x 1600 x 893	379 x 1600 x 893	
	Outdoor	845 x 970 x 370	845x970x370	845x970x370	845x970x370	845x970x370	845x970x370	845x970x370	1505x970x370	1505x970x370	
Net Weight	kg	34	54	54	54	54	54	54	89	89	
Supply Air Connection	mm	170 x 880	170 x 1200	170 x 1200	170 x 1200	170 x 1200	170 x 1200	170 x 1200	250 x 1450	250 x 1450	
Return Air Connection	Pa	200	235 x 1280	235 x 1280	235 x 1280	235 x 1280	235 x 1280	235 x 1280	250 x 1450	250 x 1450	
External Static Pressure (Max)			200	200	200	200	200	200	200	200	
Airflow	Indoor (Cooling)	I/s	P-Hi:400 Hi:317 Me:250 Lo:167	P-Hi:600 Hi:467 Me:417 Lo:317	P-Hi:650 Hi:533 Me:433 Lo:333	P-Hi:800 Hi:583 Me:467 Lo:367	P-Hi:600 Hi:467 Me:417 Lo:317	P-Hi:650 Hi:533 Me:433 Lo:333	P-Hi:800 Hi:583 Me:467 Lo:367	P-Hi:1333 Hi:1200 Me:1067 Lo:933	
	Indoor (Heating)		(R32) 4.2	(R32) 4.2	(R32) 4.2	(R32) 4.2	(R32) 4.2	(R32) 4.2	(R32) 4.2	(R410A) 8.9	
Refrigerant Type, Amount, Pre-charge Length	Quantity	kg	30**	30**	30**	30**	30**	30**	30**	0.5***	
	Refrigerant Piping	m	09.52 (3/8")	09.52 (3/8")	09.52 (3/8")	09.52 (3/8")	09.52 (3/8")	09.52 (3/8")	09.52 (3/8")	0.5***	
Connection Method	Liquid Line	mm	015.88 (5/8")	015.88 (5/8")	015.88 (5/8")	015.88 (5/8")	015.88 (5/8")	015.88 (5/8")	015.88 (5/8")	0.5***	
Installation Data	Gas Line										
	Maximum Pipe Length (One Way)	m	50	50	50	50	50	50	50	50	
	Max vertical height diff. between O.U. and I.U.										
Controller	Motion Sensor (Optional)		30 (O.U. above I.U.) / 15 (O.U. below I.U.)								
Demand response (AS4755)	No	No	No	No	No	No	No	No	No	No	
Outdoor air temperature (upper, lower limits)	°C	-15 to 43	-15 to 43	-15 to 43	-15 to 43	-15 to 43	-15 to 43	-15 to 43	-15 to 50	-15 to 50	
	Cooling	-20 to 20	-20 to 20	-20 to 20	-20 to 20	-20 to 20	-20 to 20	-20 to 20	-20 to 20	-20 to 20	
LB-KIT2	RC-E5, RC-EXZ3A, RCH-E3 or RCN-KIT4-E2										

\*The data is measured under the following conditions (AS/NZS 3823.2). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 7°CDB, 6°CWB.

\*\*Please refer to E-solution software or technical manual for additional refrigerant requirements. Flexzone not compatible with KX 1:1 systems.

# PRODUCT SPECIFICATIONS

## AKARI™ SERIES

CAPACITY	2.5kW		3.5kW		5.0kW		6.0kW	
	SRR25ZS-W SRC25ZSA-W	SRR35ZS-W SRC35ZSA-W	SRR50ZS-W SRC50ZSA-W	SRR60ZS-W SRC60ZSA-W	SRR60ZS-W SRC60ZSA-W	SRR60ZS-W SRC60ZSA-W	SRR60ZS-W SRC60ZSA-W	SRR60ZS-W SRC60ZSA-W
Power Source (Outdoor Unit)								
Nominal Capacity (Range)	Cooling T1 Heating H1 Heating H2	2.5 (0.9~3.4) 3.4 (0.9~5.0)	3.5 (0.9~4.1) 4.2 (1.0~5.2)	5.0 (1.2~6.0) 5.4 (1.0~8.2)	5.6 (1.2~6.5) 6.7 (1.0~8.6)	5.6 (1.2~6.5) 6.8	5.6 (1.2~6.5) 6.7 (1.0~8.6)	5.6 (1.2~6.5) 6.8
Power Consumption	KW	0.56 (0.20~0.90) 0.75 (0.20~1.42)	0.93 (0.19~1.26) 1.01 (0.20~1.45)	1.42 (0.22~2.02) 1.39 (0.2~2.86)	1.70 (0.22~2.57) 1.89 (0.2~2.89)	1.70 (0.22~2.57) 1.89 (0.2~2.89)	1.70 (0.22~2.57) 1.89 (0.2~2.89)	1.70 (0.22~2.57) 1.89 (0.2~2.89)
Maximum Power Consumption		1.65	1.65	2.9	2.9	2.9	2.9	2.9
Running Current	A	2.7	4.2	6	7.2	7.2	7.2	7.2
*Operation Data		3.5	4.5	5.9	8	8	8	8
Inrush Current, Maximum Current		3.5, 9.0	4.5, 9.0	5.0, 15.0	5.0, 15.0	5.0, 15.0	5.0, 15.0	5.0, 15.0
EER		4.46	3.76	3.52	3.29	3.29	3.29	3.29
COP		4.53	4.16	3.88	3.54	3.54	3.54	3.54
Sound Power Level (JIS C9612)	Outdoor	60	62	63	65	65	65	65
Sound Pressure Level (JIS C9612)	Indoor	37-33-30-24	38-34-31-25	41-37-24-29	44-38-35-30	44-38-35-30	44-38-35-30	44-38-35-30
External Dimensions (HxWxD)	Outdoor	47	50	51	52	52	52	52
	Indoor	200x750(+120)x500	200x750(+120)x500	200x950(+120)x500	200x950(+120)x500	200x950(+120)x500	200x950(+120)x500	200x950(+120)x500
	Outdoor	540x780(+65)x290	540x780(+65)x290	640x800(+71)x290	640x800(+71)x290	640x800(+71)x290	640x800(+71)x290	640x800(+71)x290
Energy Label (GEVS 2019)	Hot	★★★★★ (3.5)	★★★★★ (3.5)	★★★★★ (3.5)	★★★★★ (3.5)	★★★★★ (3.5)	★★★★★ (3.5)	★★★★★ (3.5)
Average	Cooling	★★★★★ (3.5)	★★★★★ (3.5)	★★★★★ (3.5)	★★★★★ (3.5)	★★★★★ (3.5)	★★★★★ (3.5)	★★★★★ (3.5)
Cold	Heating	★★★★★ (3)	★★★★★ (3)	★★★★★ (3)	★★★★★ (3)	★★★★★ (3)	★★★★★ (3)	★★★★★ (3)
Net weight	Indoor	20.5	20.5	24	24	24	24	24
Airflow	Outdoor	34.5	34.5	45	45	45	45	45
	Cooling (Indoor)	158-133-108-75	167-142-117-83	211-183-167-125	242-192-175-133	242-192-175-133	242-192-175-133	242-192-175-133
	Heating (Indoor)	167-150-133-100	175-158-142-108	233-208-183-142	250-217-192-150	250-217-192-150	250-217-192-150	250-217-192-150
Installation Data	Quantity	(R32) 0.78	(R32) 0.78	(R32) 1.3				
	Pre-Charged to Pipe	m	15	15	15	15	15	15
	Liquid line	Ø6.35 (1/4")						
	Gas line	Ø9.52 (3/8")						
Maximum Pipe Length (One Way)	m	20	20	30	30	30	30	30
Max Vertical Height Diff. Between O.U. and I.U.		10 (O.U. above I.U.) / 10 (O.U. below I.U.)	20 (O.U. above I.U.) / 20 (O.U. below I.U.)	20 (O.U. above I.U.) / 20 (O.U. below I.U.)	20 (O.U. above I.U.) / 20 (O.U. below I.U.)	20 (O.U. above I.U.) / 20 (O.U. below I.U.)	20 (O.U. above I.U.) / 20 (O.U. below I.U.)	20 (O.U. above I.U.) / 20 (O.U. below I.U.)
Standard accessoires			Polypropylene Net x1					
Optional parts			Interface kit (SC-BIKN2-E) / WiFi Kit					
Demand Response (AS4755)			Yes					
Outdoor air temperature (upper, lower limits)								
Heating	Heating	°C						
Cooling	Cooling	°C						

(1) The data is measured at the conditions mentioned in the table to the left.  
(2) The air conditioner is manufactured and tested in conformity with the AS/NZS.

(3) Sound level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.


(4) Select the breaker size according to applicable national standard.

(5) The operation data indicates when the air-conditioner is operated at 240V 50Hz.

\*Product specifications are accurate at time of printing and may be subject to updates.


# FDUM Series

## FDUM50VH

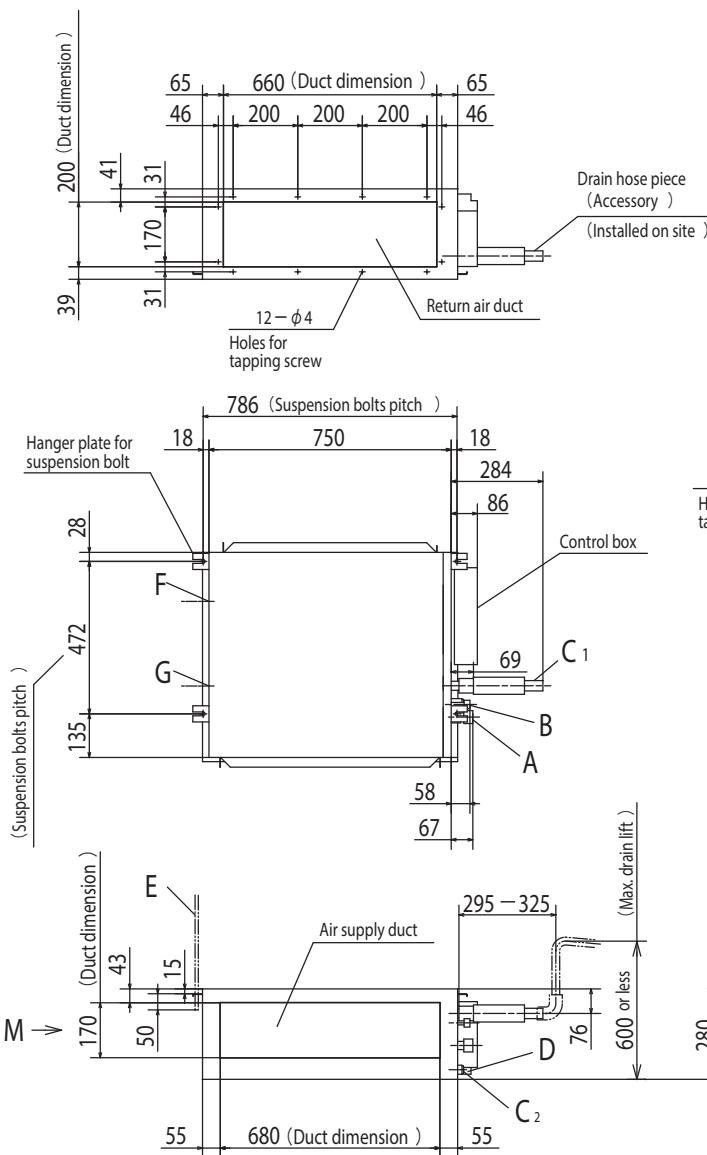


Symbol	Content	
A	Gas piping	$\phi$ 12.7 (1/2") (Flare)
B	Liquid piping	$\phi$ 6.35 (1/4") (Flare)
C1	Drain piping	VP25 (O.D.32)
C2	Drain piping (Gravity drainage)	VP20
D	Hole for wiring	
E	Suspension bolts	(M10)
F	Outside air opening for ducting	( $\phi$ 150) (Knock out)
G	Air outlet opening for ducting	( $\phi$ 125) (Knock out)
H	Inspection opening	(450 x 450)

Note (1) The model name label is attached on the lid of the control box.

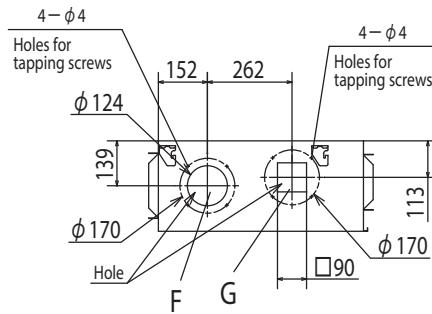

View M

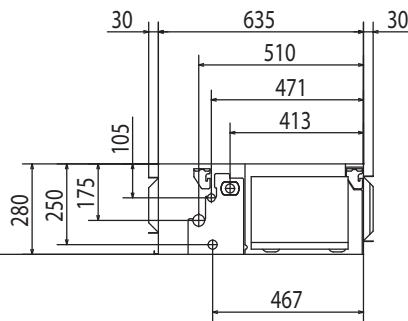


Unit:mm


### Space for installation and service

Select either of two cases to keep space for installation and services.

(Case 1) From side of unit

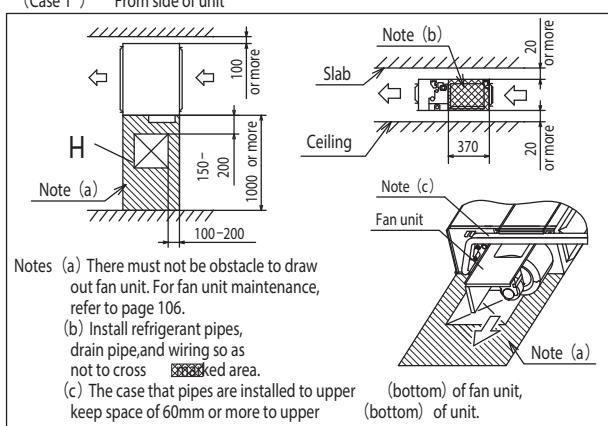


(Case 2) From bottom of unit

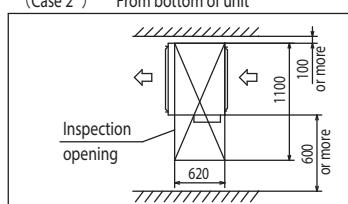



# FDUM Series

**FDUM60VH**

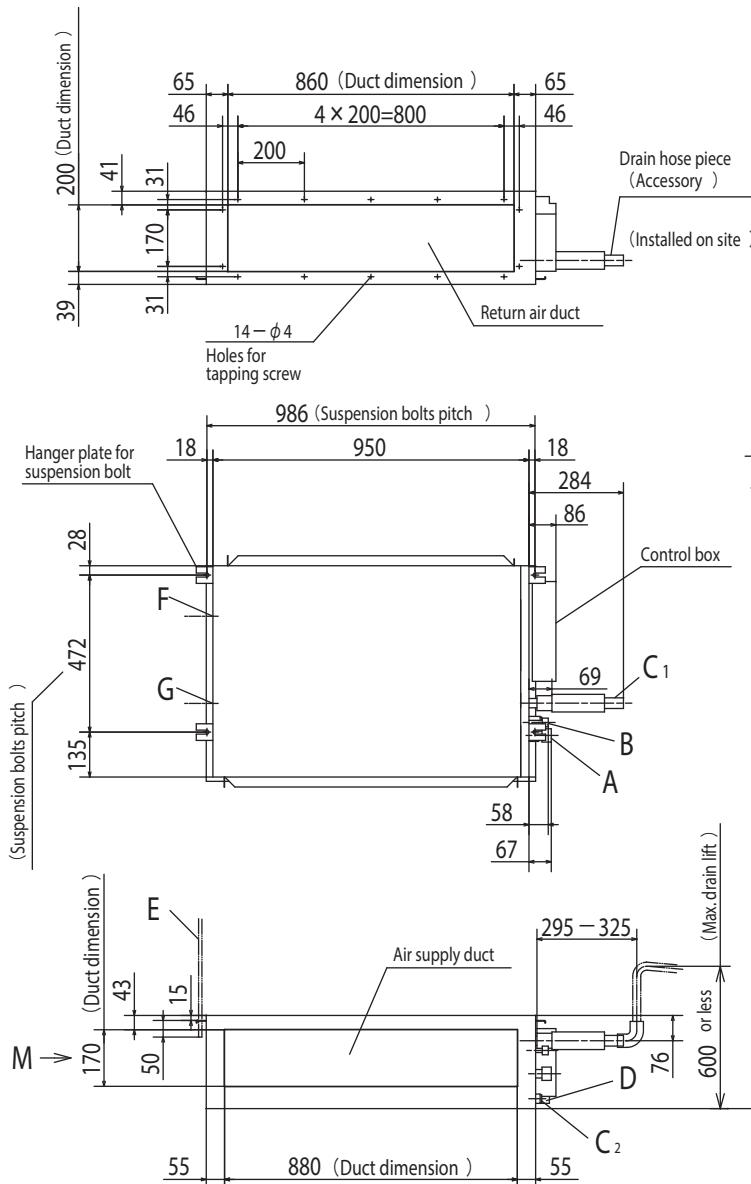

Symbol	Content		
	Model	60	71
A	Gas piping	$\phi 12.7$ (1/2") (Flare)	$\phi 15.88$ (5/8") (Flare)
B	Liquid piping	$\phi 6.35$ (1/4") (Flare)	$\phi 9.52$ (3/8") (Flare)
C1	Drain piping	VP25 ( O.D.32 )	
C2	Drain piping (Gravity drainage )	VP20	
D	Hole for wiring		
E	Suspension bolts	(M10)	
F	Outside air opening for ducting	$(\phi 150)$ (Knock out)	
G	Air outlet opening for ducting	$(\phi 125)$ (Knock out)	
H	Inspection opening	$(450 \times 450)$	


Note (1) The model name label is attached on the lid of the control box.

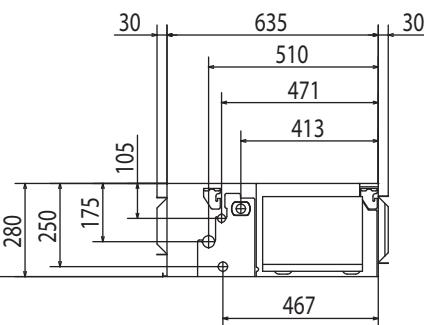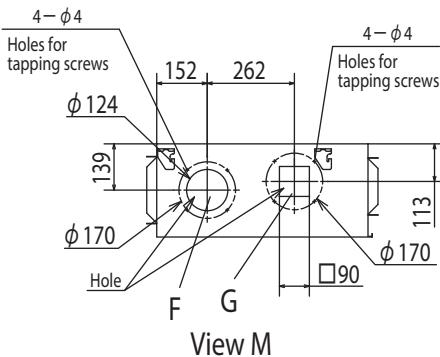

Space for installation and service

Select either of two cases to keep space for installation and services.

(Case 1 ) From side of unit

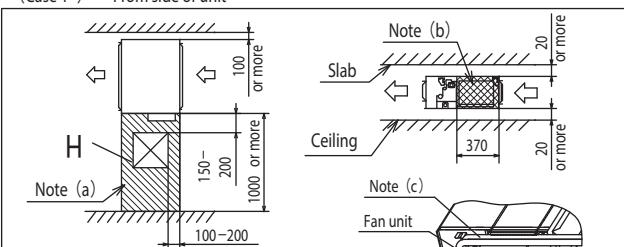


Notes (a) There must not be obstacle to draw out fan unit. For fan unit maintenance, refer to page 106.

(b) Install refrigerant pipes, drain pipe, and wiring so as not to cross the marked area.


(c) The case that pipes are installed to upper (bottom) of fan unit, keep space of 60mm or more to upper (bottom) of unit.

(Case 2 ) From bottom of unit

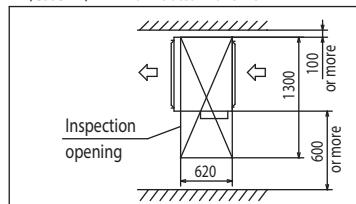


# FDU Series

## FDU71VH

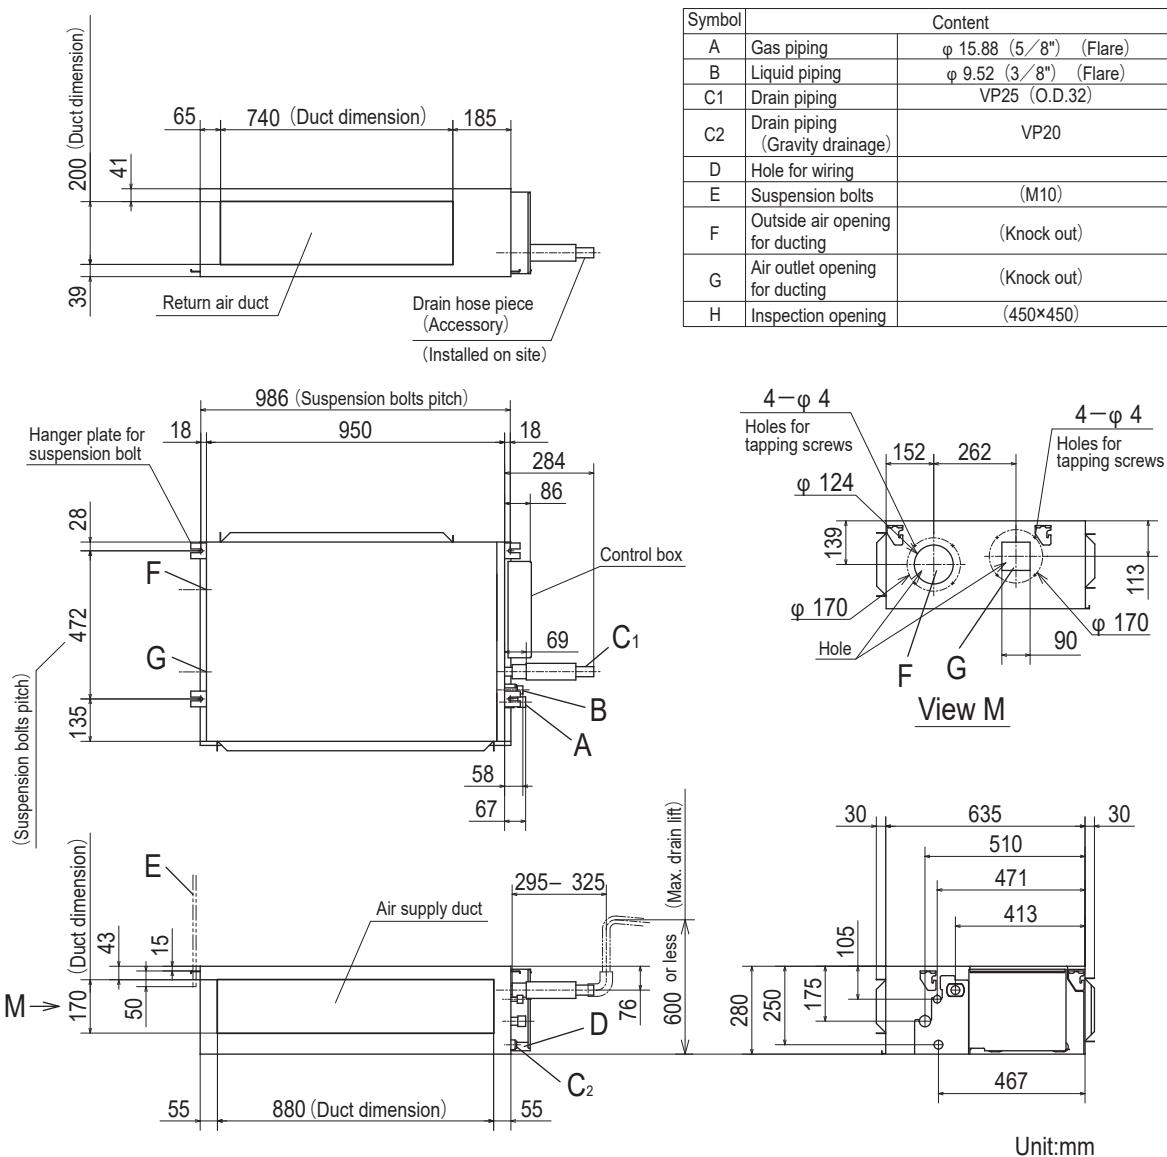


**Space for installation and service**

Select either of two cases to keep space for installation and services.  
(Case 1) From side of unit

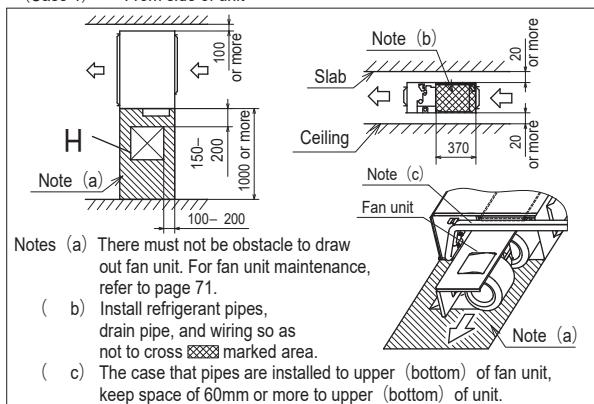


**(Case 2) From bottom of unit**

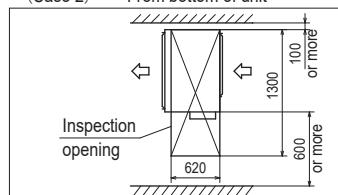

# FDU Series


## **FDU100VH, 125VH, 140VH**

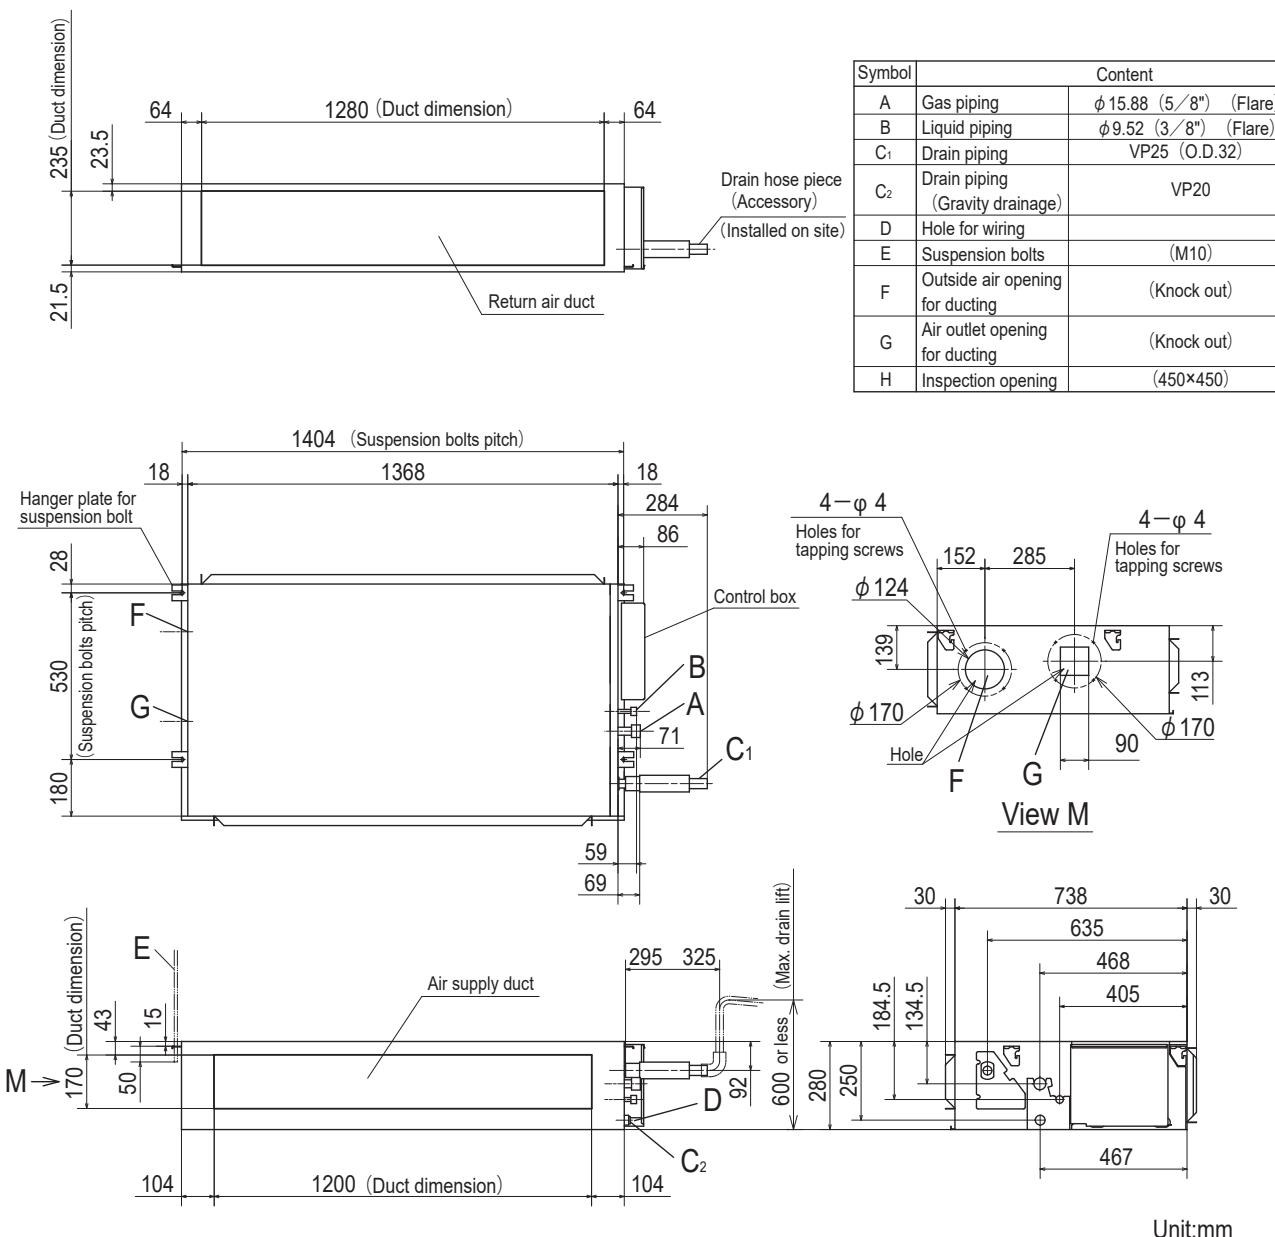


Space for installation and service

Select either of two cases to keep space for installation and services.

(Case 1) From side of unit

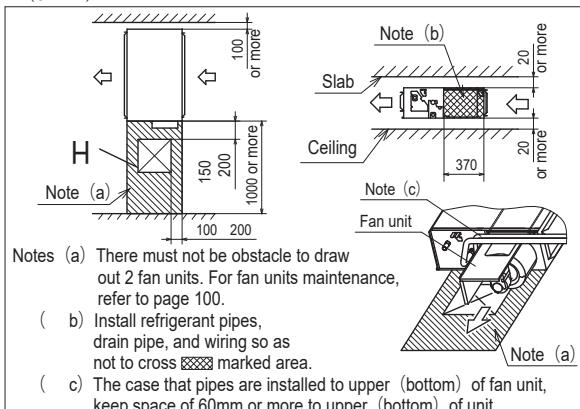


(Case 2) From bottom of unit

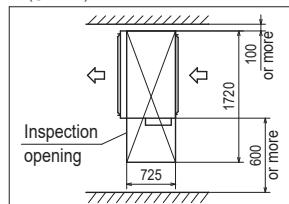

Note (1) The model name label  
is attached on the lid  
of the control box.


# FDUA Series

## FDUA100, 125VH

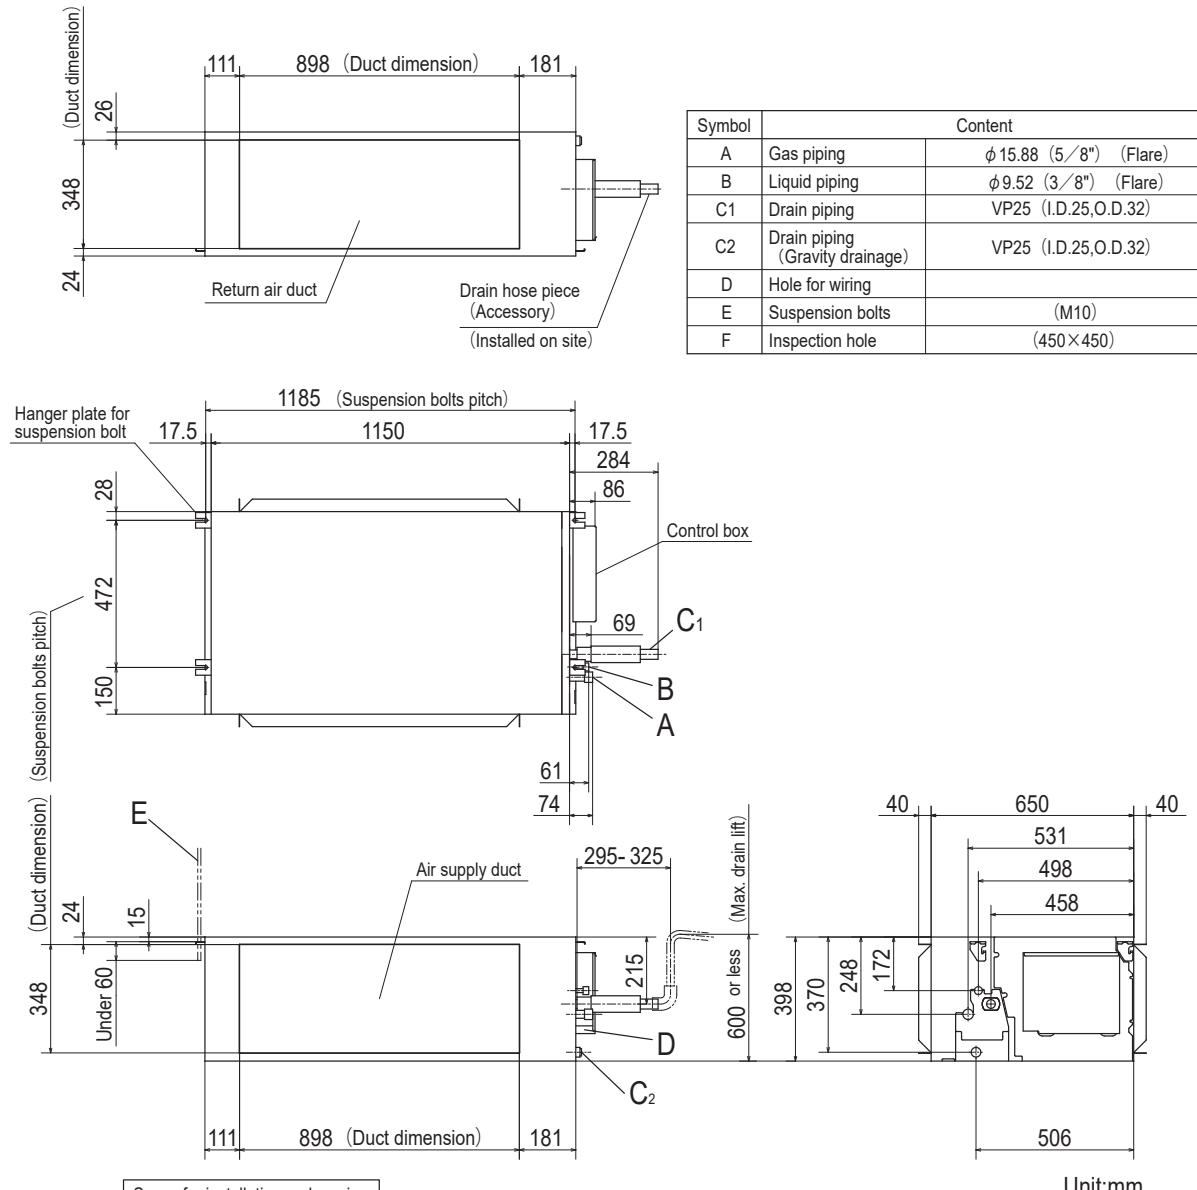


### Space for installation and service

Select either of two cases to keep space for installation and services.  
(Case 1) From side of unit

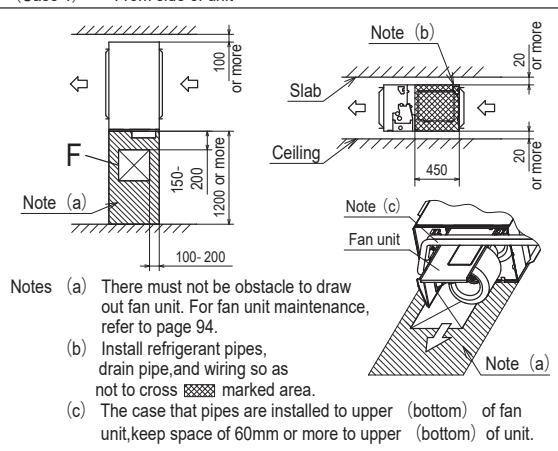


### (Case 2) From bottom of unit

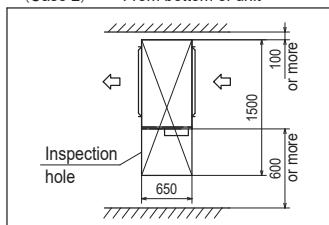


# FDUA Series

## FDUA140VH

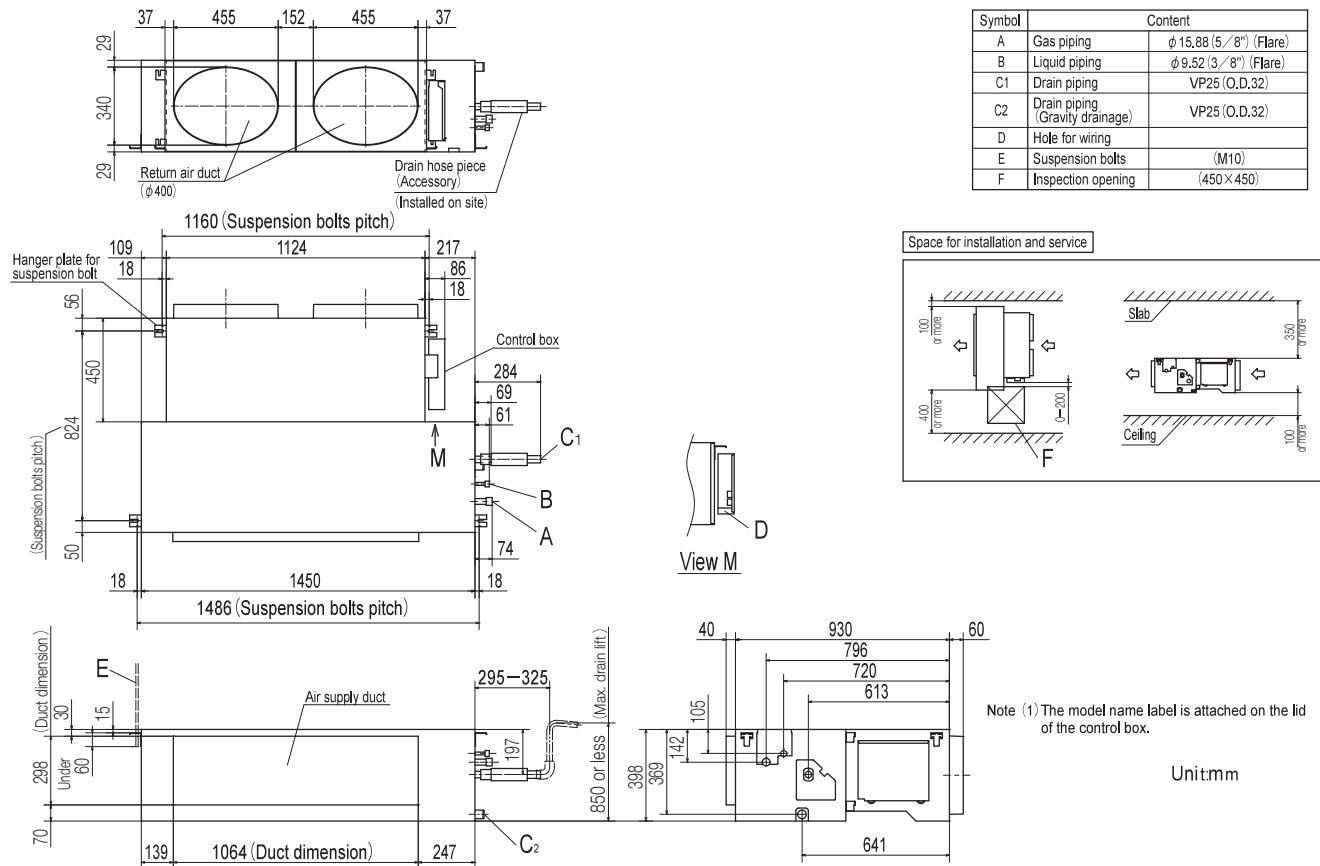


## FDUA160VH

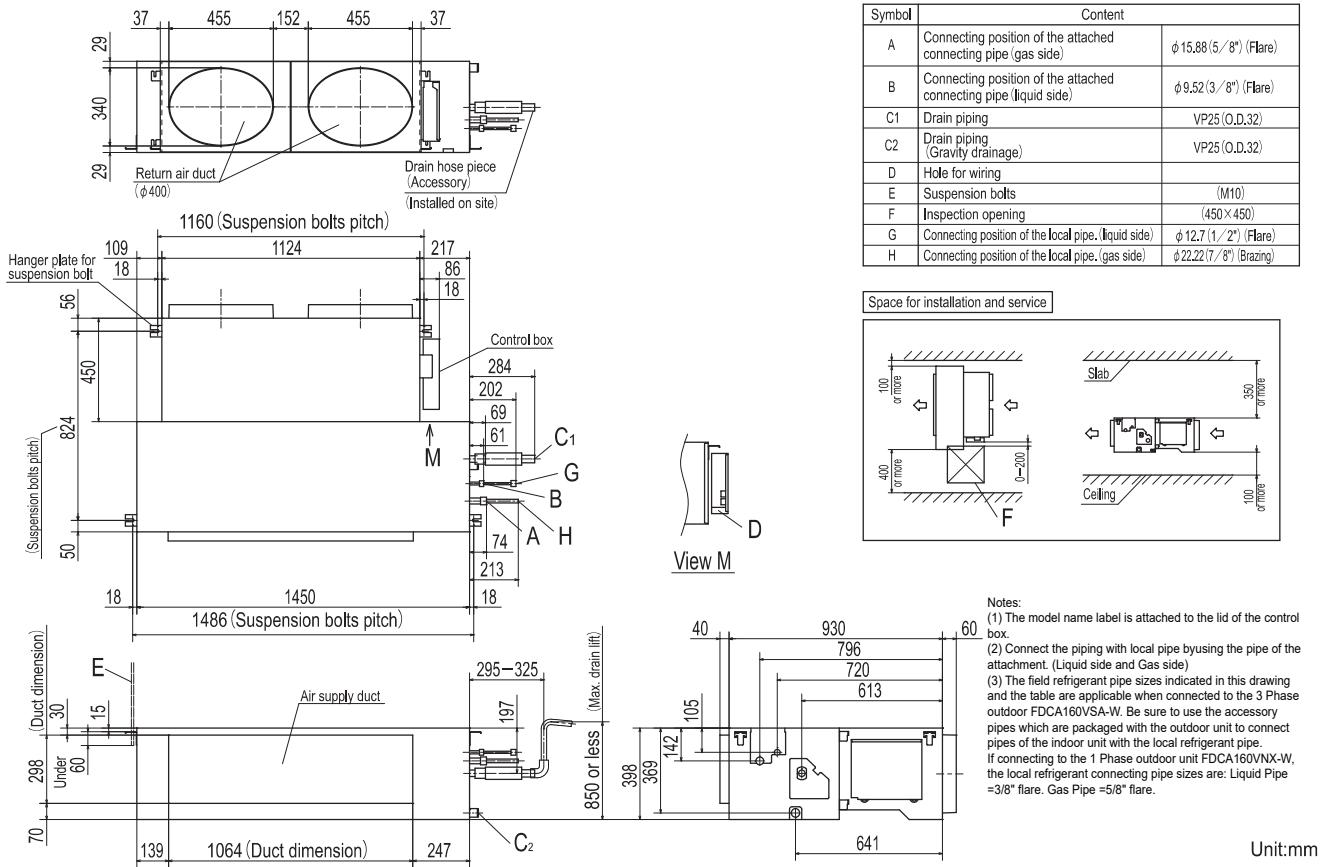


# FDUA Series

## FDUA200, 250VH

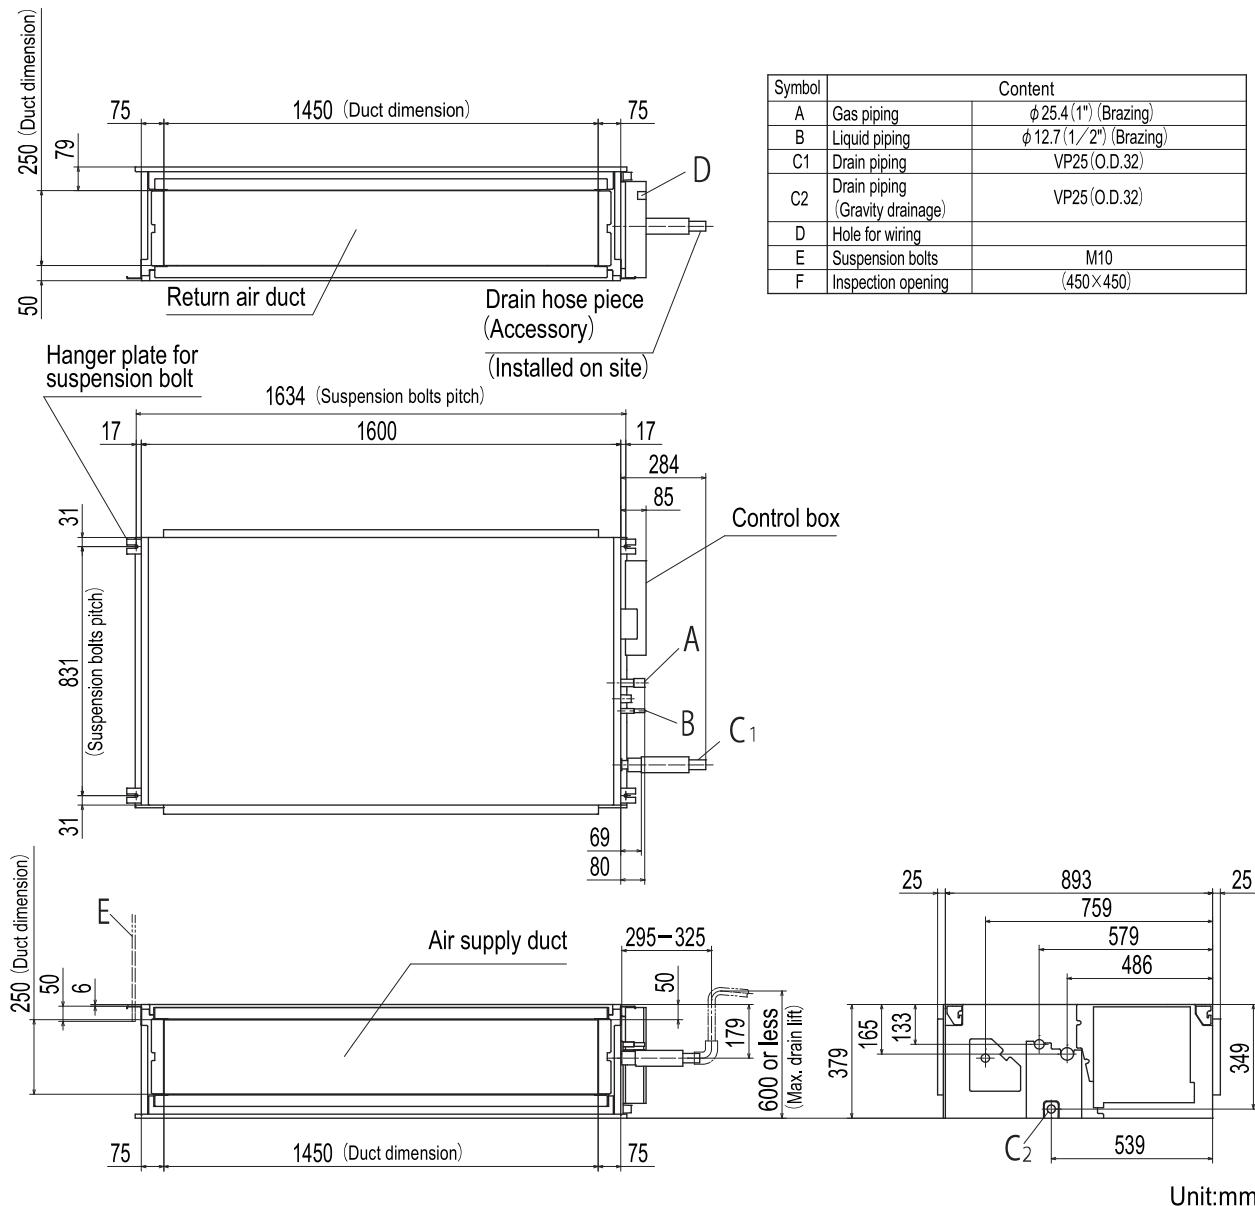

### Space for installation and service

Select either of two cases to keep space for installation and services.  
(Case 1) From side of unit

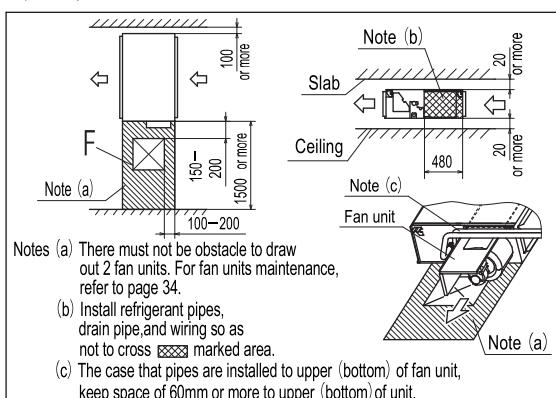


Notes (a) There must not be obstacle to draw out 2 fan units. For fan units maintenance, refer to page 34.

(b) Install refrigerant pipes, drain pipe, and wiring so as not to cross marked area.

(c) The case that pipes are installed to upper (bottom) of fan unit, keep space of 60mm or more to upper (bottom) of unit.


### (Case 2) From bottom of unit

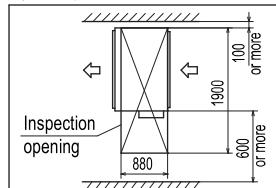

Note (1) The model name label is attached on the lid of the control box.


# KX Series

FDU90KXE6F-W

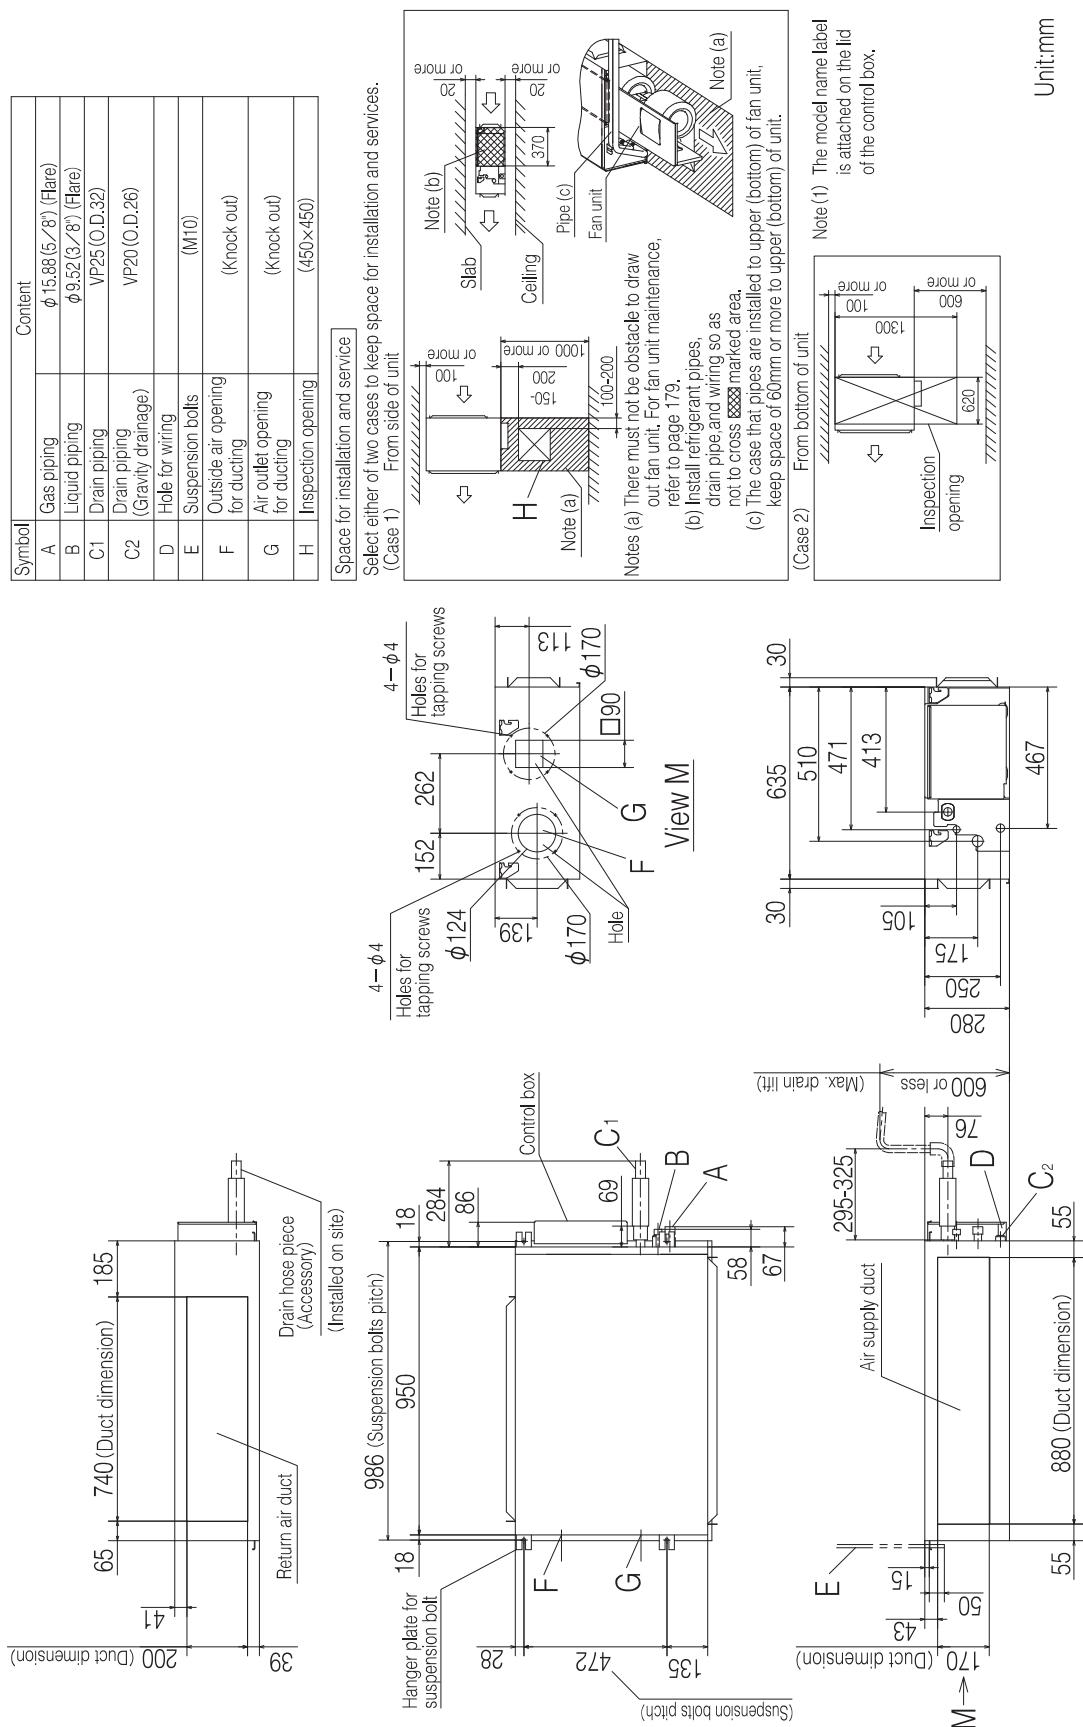


# KX Series

FDU112KXE6F-W, 140KXE6F-W, 160KXE6F-W

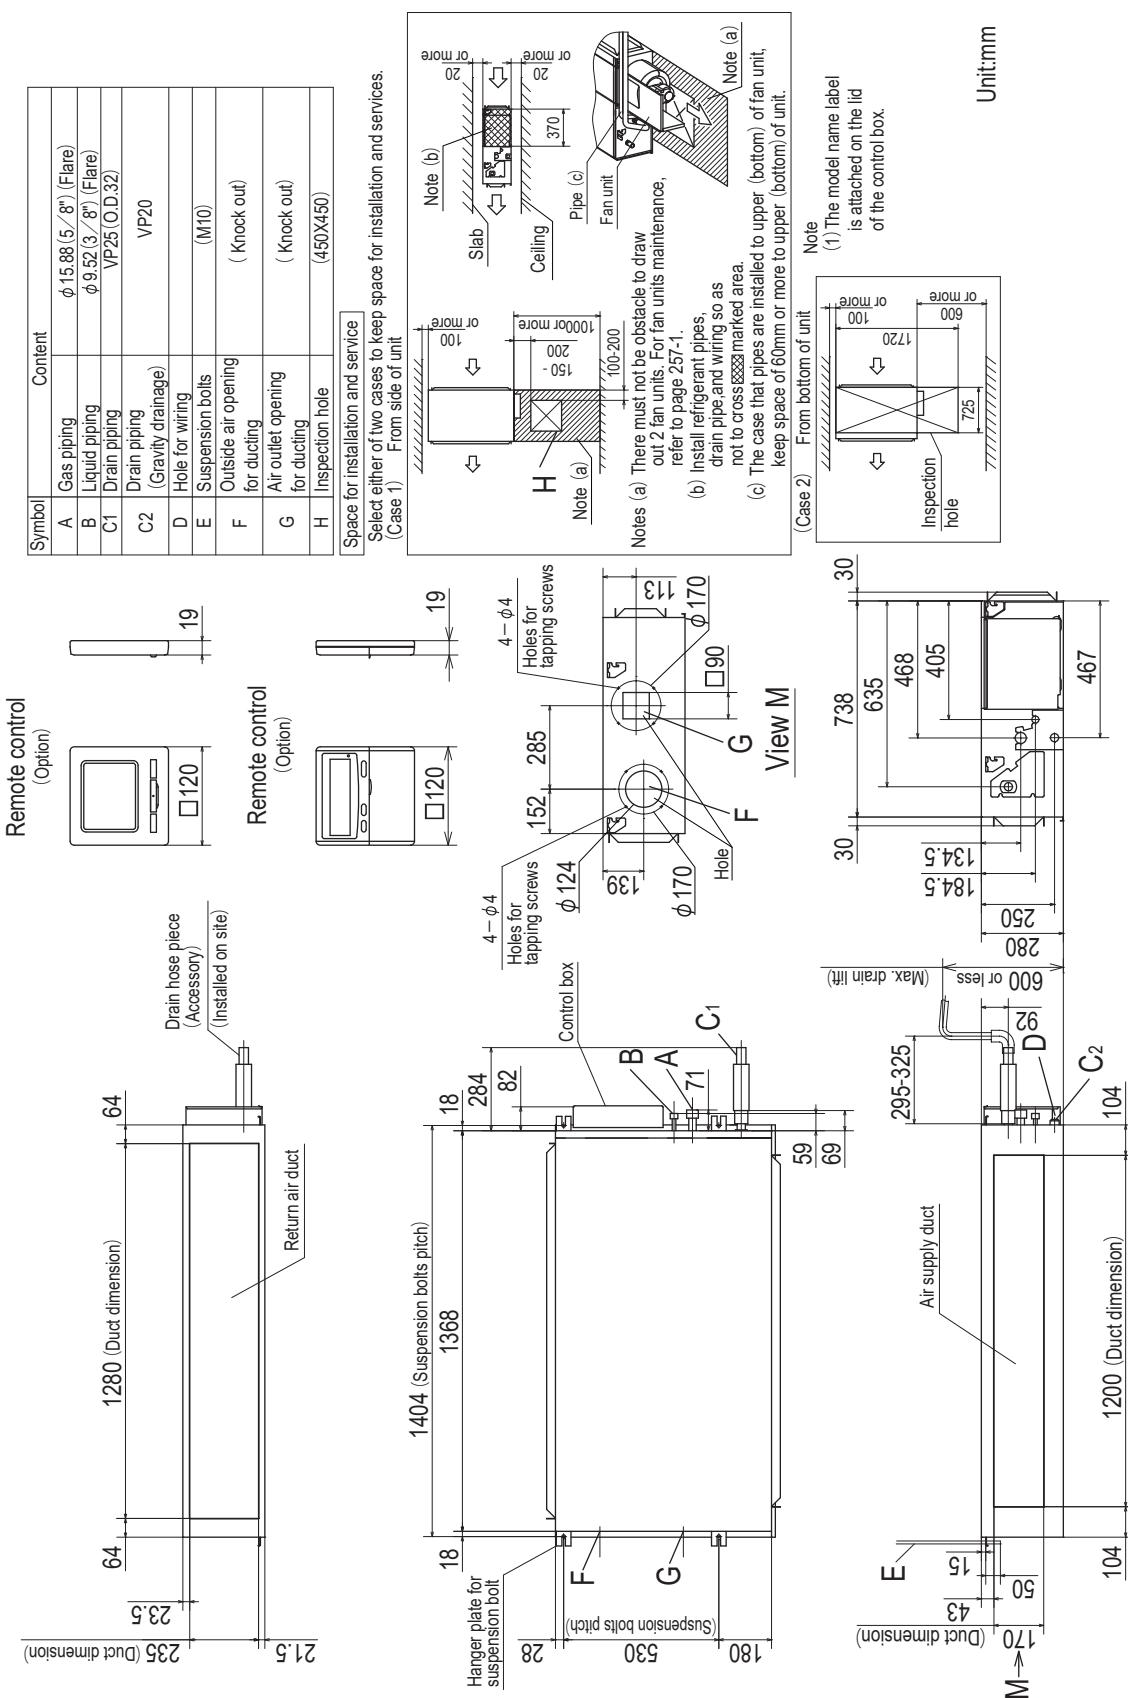


# KX Series

FDUA224KXZE1, 280KXZE1

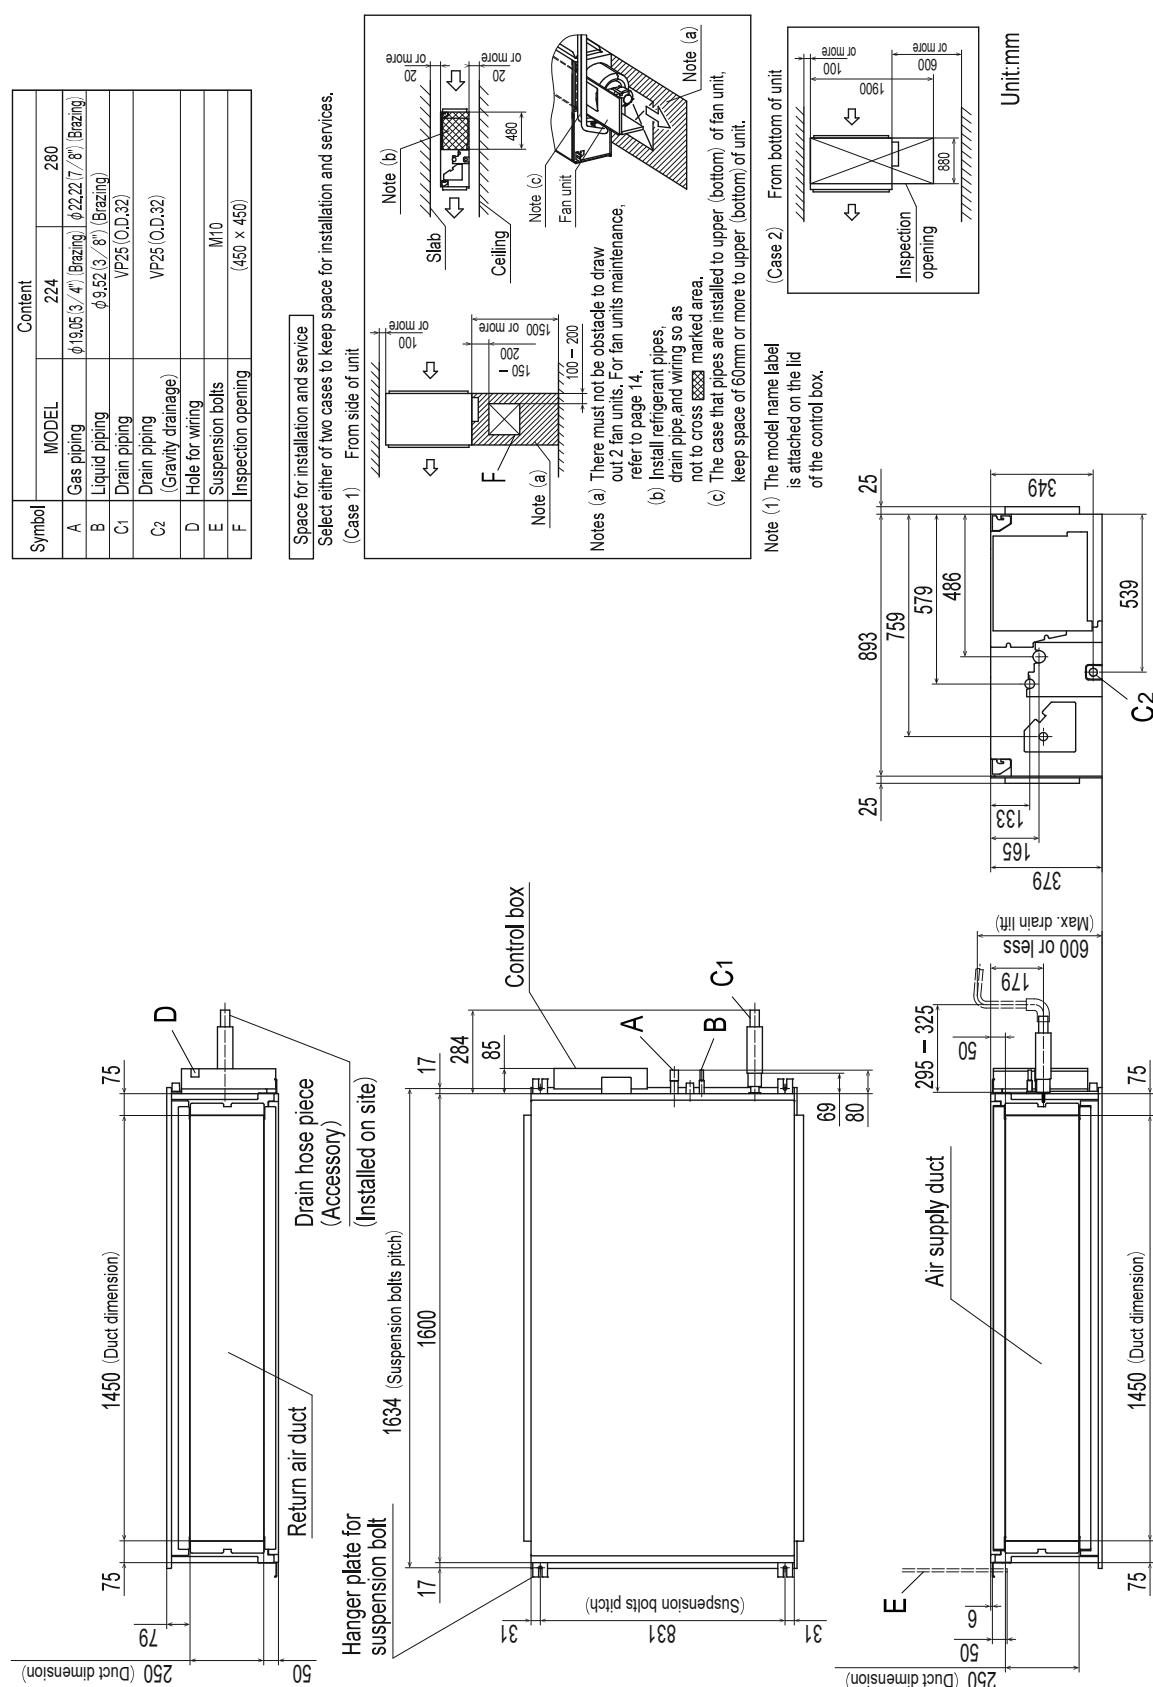

# AKARI™ Series


## SRR25ZS-W, 35ZS-W

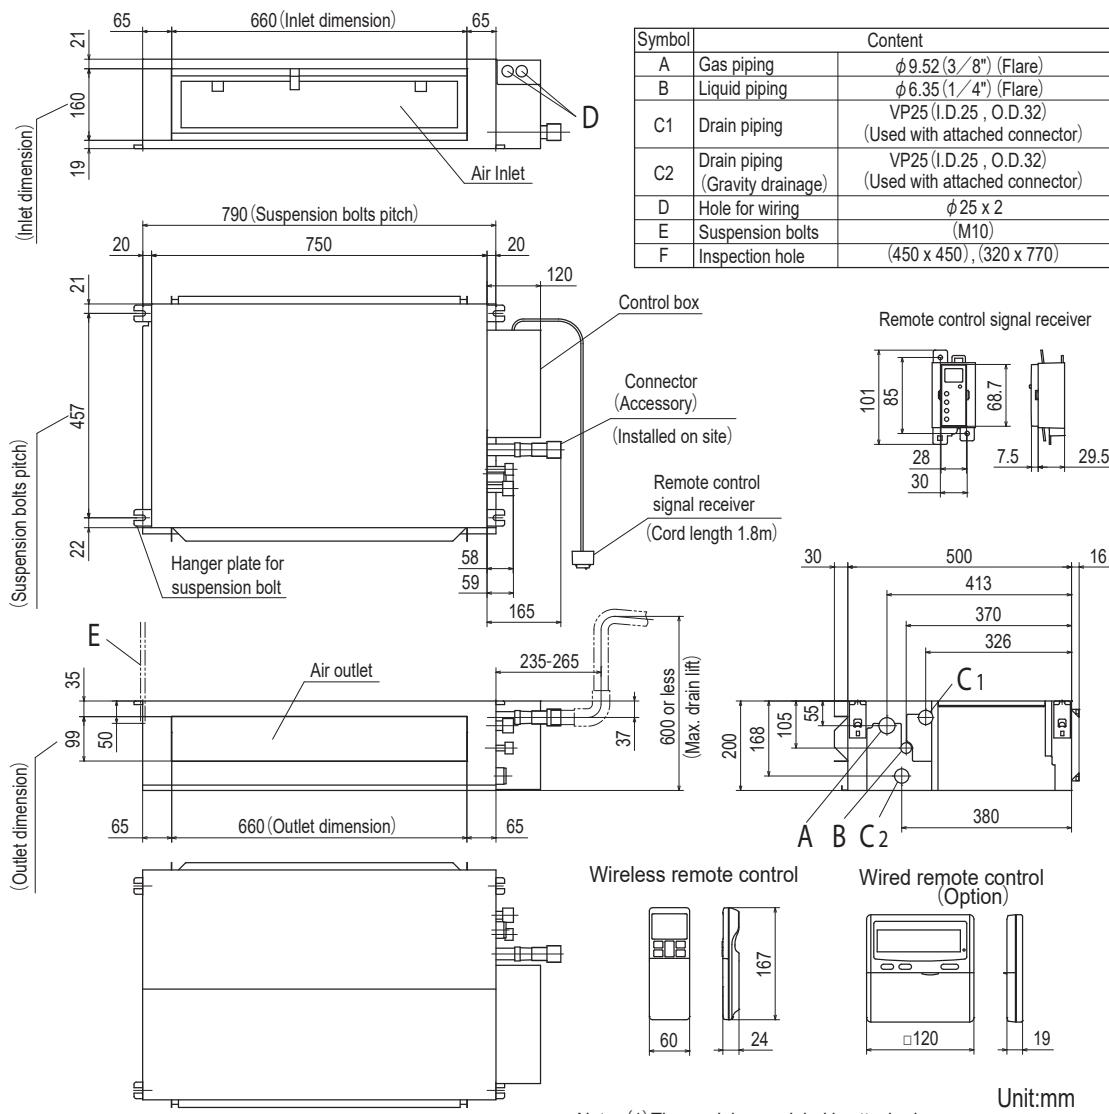

Unit:mm

Notes  
 (1) The model name label is attached on the lid of the control box.  
 (2) To connect the wired remote control, the interface kit (SC-BIKN2-E) is required.

### Space for installation and service

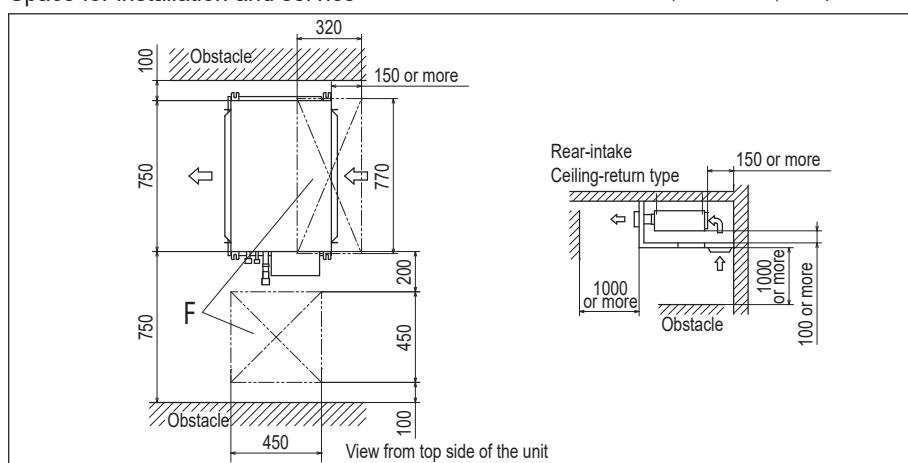

mhiheatpumps.co.nz G.S.T. 105-673-620

**New Zealand:** Phone: **0800 138 007**

**Auckland** 95 Manukau Road, Epsom, Auckland, 1023

Mitsubishi Heavy Industries Air conditioners Australia, Pty. Ltd.  
New Zealand Branch

MOVE THE WORLD FORWARD **MITSUBISHI  
HEAVY  
INDUSTRIES  
GROUP**